




Z1183-FC-86

SOLIDS INTERCEPTOR WITH FLUSH COVER AND 250 [15.8] G.P.M. FLOW RATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

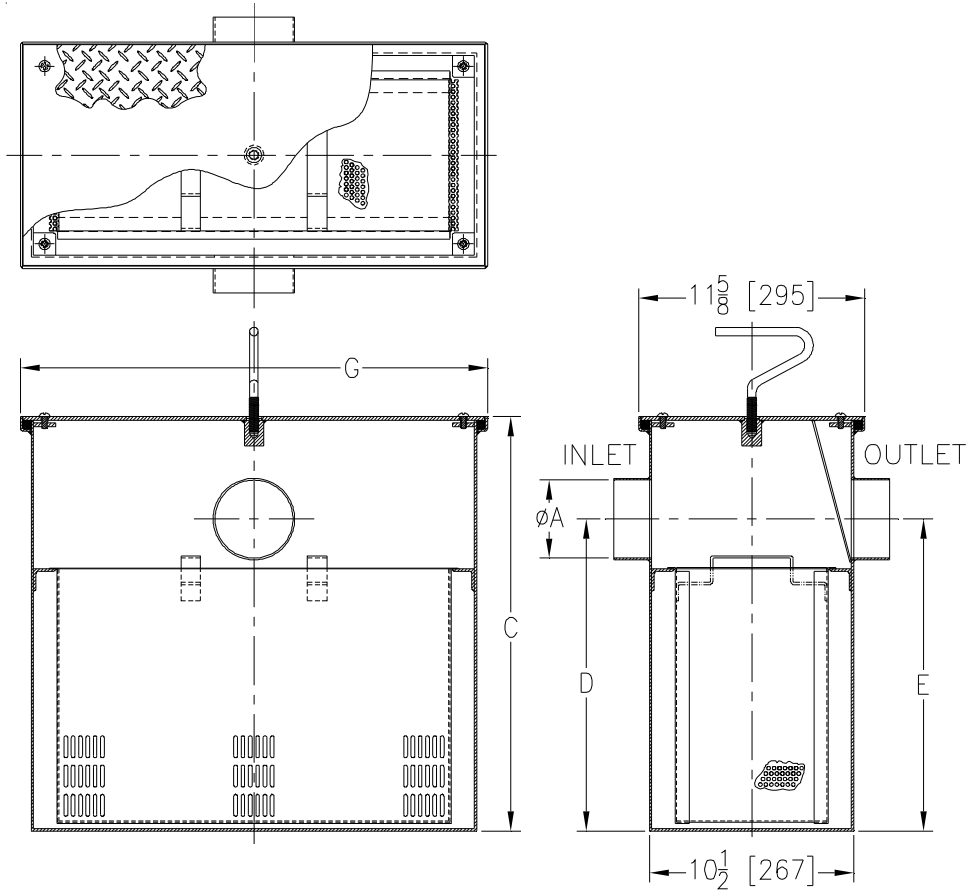

Size	'A' Inlet/Outlet Size	Flow Rate G.P.M. [L/S]	Solids Cap. Cubic Ft. [m ³]	Dimensions In Inches		
				C	G	D/E
1400	5 [127]	250 [15.8]	3.29 [.093]	41 [1041]	24 3/8 [619]	36 [914]

ENGINEERING SPECIFICATION:
ZURN Z1183-FC-86

Large capacity acid resistant coated interior and exterior fabricated steel, or stainless steel solids interceptor, for recessed installation with screen attached to gasketed, non-skid secured cover with removable lift handle, and removable sediment basket. Size to be used with corresponding Z1172 Grease Interceptors.

OPTIONS (Check/specify appropriate option)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -CS Custom Screens (Specify material and perforation size required)
- ___ -E Acid Resistant Coated Interior and Exterior Fabricated Steel Extension Section.
- ___ -YR Replacement Stainless Steel Bucket Assembly

REV.	DATE: 05/28/13	C.N. NO. 129422
PROD./DWG. NO. Z1183-FC-86		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED