


Z-1186-106 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

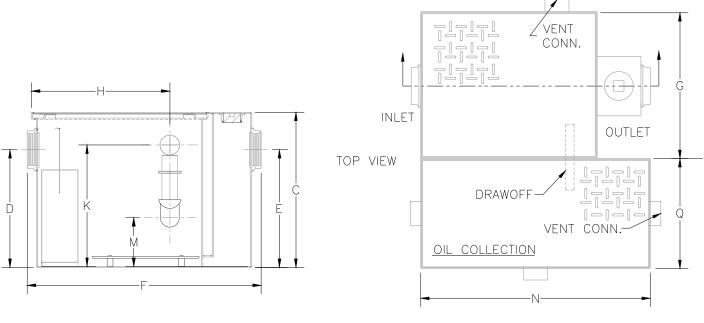

SIZE	Inlet/Outlet Flow Rate Size** G.P.M.		Water Capacity Gal.[L]		Oil Storage Tank Capacity Gal.[L]	
300	3 [76]	35 [132]	21 [79]	140 [47]	5 [19]	

	Dimensions in inches													
SIZE	С	D/E	F	G	Н	K	М	Ν	Q	R				
300	13 5/8[346]	8 1/8 [206]	22 5/8 [575]	14 [356]	11 5/8 [295]	10 5/8 [270]	4 5/16 [110]	22 5/8 [575]	11 7/8 [302]	13 5/8 [346]				

ENGINEERING SPECIFICATION: ZURN Z-1186-106 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z-
- Acid Resistant Coated Fabricated Steel*
- ** Inlet and outlet size shown indicates standard operating size and flow control setting. Size #300 will have 3" [76] connections reduced to 2 [51] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

 REV.
 DATE: 8/5/99
 C.N. NO.
 83054

 *REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED
 DWG NO.
 P-14739
 PRODUCT NO.
 Z-1186-106

 ZURN INDUSTRIES, INC.
 • SPECIFICATION DRAINAGE OPERATION • 1801 Pittsburgh Ave.
 • Erie, PA 16514