
**TAG** 

## SIZE 50 SAND INTERCEPTOR WITH SEDIMENT BUCKET

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

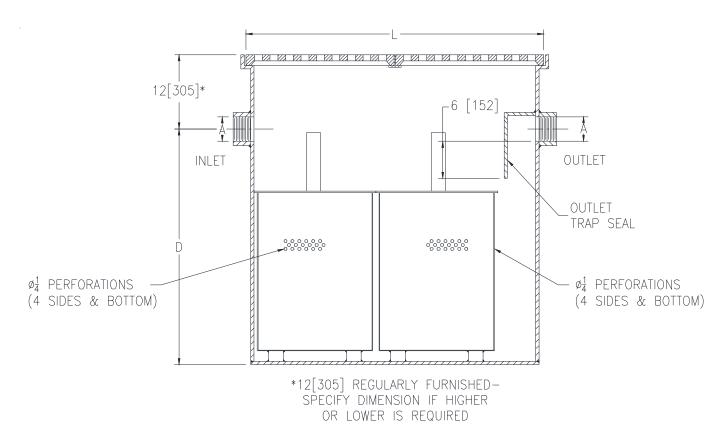

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width	Approx. Wt. Lbs. [Kg]
50	50 [189]	4 [102]	48 [1219]	26 [660]	120 [454]	4	24 [610]	204 [92]

## **ENGINEERING SPECIFICATION: ZURN Z1187-SI-165**

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, sediment baskets, and complete with removable heavy-duty grates.

OPTIONS (Chaple/appairs appropriate antions)

OFTIC	) CPIC	check/specify appropriate options)
PREFI	XES Z	Acid Resistant Coated Fabricated Steel*
<b>SUFFI</b>	XES	
	-E -DG -K -KC	Integral Extension Assembly (Specify extension height) Duresist Grate Anchor Flange 1-3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K option. Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension required to accommodate -KC option.
	-NH -SC -VP	No-Hub Inlet and Outlet (Z1040) Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load. Vandal-Proof Screws
Regular	rly furr	sished unless otherwise specified

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, 877-892-5216 Rev.

Date: 08/13/2020 C.N. No. 142942

Prod. | Dwg. No. Z1187-SI-165