


Z1172-163 LARGE CAPACITY GREASE INTERCEPTOR W/ DOUBLE WALL CONTAINMENT

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

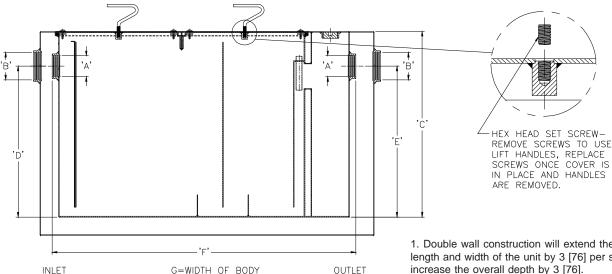

. Double wall construction will extend the overall
ength and width of the unit by 3 [76] per side and
ncrease the overall depth by 3 [76].

	'A'	'B'	Flow Rate	Capa	city	رب ا	Approx.	Dimensions in Inches			
Size	Inlet/ Outlet	Inlet/ Outlet	G.P.M.	Water	Grease	No. of Covers	Wt. Lbs.				
	Size	Size	[L]	Gal. [L]	Lbs. [kg]	žΰ	[kg]	С	D/E	F	G
900	3 [76]	6[152]	75 [284]	65 [246]	150 [68]	1	590 [268]	22-3/4 [578]	18-1/2 [470]	36 [914]	28-5/8 [727]
1000			100 [378]	110 [416]	200 [91]		775 [352]	27 [686]	23 [584]	42-3/4 [1086]	33-5/8 [854]
1100			125 [472]	150 [567]	250 [114]	2 -	1219 [553]	30-1/8 [765]	24-1/2 [622]	49-1/4 [1251]	40 [1016]
1200	4 [102]		150 [567]	195 [737]	300 [136]		1382 [627]	30-3/4 [781]	25-1/4 [641]	56 [1422]	41-5/8 [1057]
1300	4 [102]		200 [756]	270 [1021]	400 [182]		1641 [744]	35-1/2 [902]	29-7/8 [759]	61 [1549]	43-5/8 [1108]
1400	5 [127]	8 [203]	250 [945]	465 [1758]	500 [227]		2211 [1003]	41 [1041]	36 [914]	71 [1803]	51-5/8 [1311]
1500			300 [1134]	665 [2514]	600 [272]		2806 [1273]	46-1/4 [1175]	39-5/8 [1006]	80 [2032]	58-5/8 [1489]
1600	6 [152]		350 [1323]	865 [3278]	700 [318]		3310 [1501]	50-1/2 [1283]	43-7/8 [1114]	87 [2210]	63-5/8 [1616]
1700			400 [1512]	1095 [4139]	800 [363]	3	3818 [1732]	54-1/4 [1378]	47-5/8 [1210]	94 [2388]	67 [1702]
1800			450 [1701]	1280 [4838]	900 [409]		4220 [1914]	55-1/4 [1403]	48-5/8 [1235]	100 [2540]	72 [1829]
1900			500 [1890]	1440 [5443]	1000 [454]		4468 [2027]	57-1/4 [1454]	51-5/8 [1311]	104 [2642]	74 [1880]

ENGINEERING SPECIFICATION: ZURN Z1172-163

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor with double wall containment, rated at ____ GPM and Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug (which can be used as a sampling port) and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- Ζ Acid Resistant Coated Fabricated Steel*
 - _ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- -AL Aluminum Cover
- -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- Heavy duty traffic cover rated at 10,000 lbs. [4536 kg] maximum safe live load. An increase 'C' dim. is required when -HD option is -HD specified. (See -HD option specification sheet)
- _ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. (A 3 [76] minimum Extension Height is required when Anchor Flange (-K) Option is specified.)
- -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. (A 3 [76] minimum Extension Height is required when Anchor Flange (-KC) Option is specified.)
- -L Angle type (Z1108-L) flow control device.
- -PW Plug Wrench

DATE: 06/19/12 C.N. NO. 124477 REV. *REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED DWG. NO. 309969 **PRODUCT NO. Z1172-163**

Phone: 814\455-0921 Fax: 814\454-7929 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292