




Z1173-103

SIZE 400 EJECTO-MATIC GREASEPTOR WITH DUAL HIGH/LOW INLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

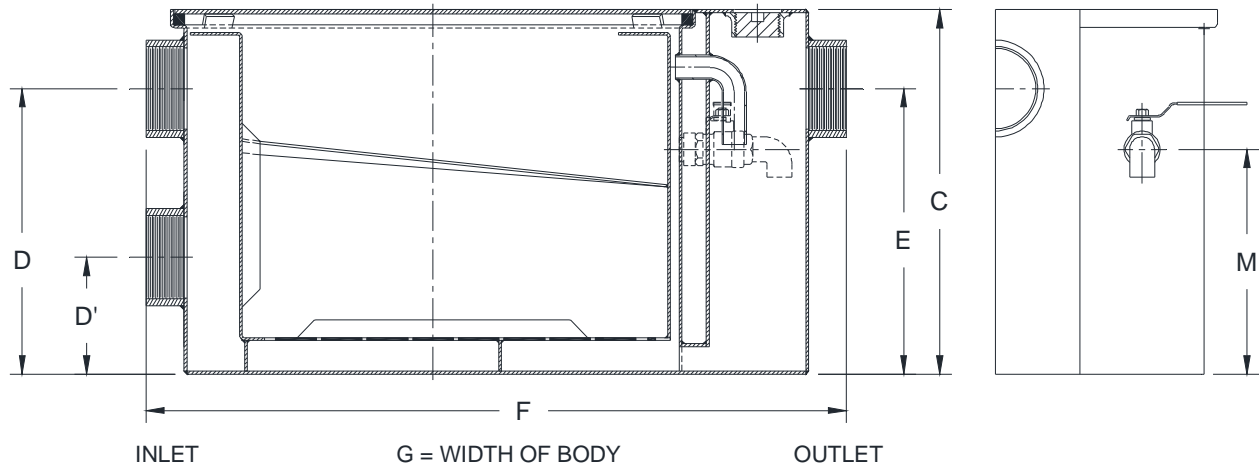

Size	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches					M C/L Valve
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	D'	F	G	
400	3 [76]	15 [57]	10 [38]	30 [14]	87 [39]	13-3/8 [340]	9-3/8 [238]	4 [102]	27-1/8 [689]	16-3/4 [425]	6-7/8 [175]

ENGINEERING SPECIFICATION: ZURNZ1173-103

Acid Resistant Coated interior and exterior fabricated grease interceptor, PDI rated at 10 GPM and 30 Lbs [14 kg] grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray and grease retention tray adjacent to grease draw-off valve. Gasketed non-skid secured cover, complete with Z1108 flow control fitting. Regularly furnished with dual high/low inlet and outlet connections.* Location of outlet from bottom of interceptor cannot be changed. Draw-off connection regularly furnished on outlet side.

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -L Angle type (Z1108-L) flow control device.
- ___ -PW Plug Wrench
- ___ -R Recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with removable lift handle.
- ___ -RE Recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with removable lift handles.

* Regularly furnished unless otherwise specified.