




Z1183-FC-83

#800 SOLIDS INTERCEPTOR W/ FLUSH COVER & 4 [102] INLET & OUTLET

SPECIFICATION SHEET
TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

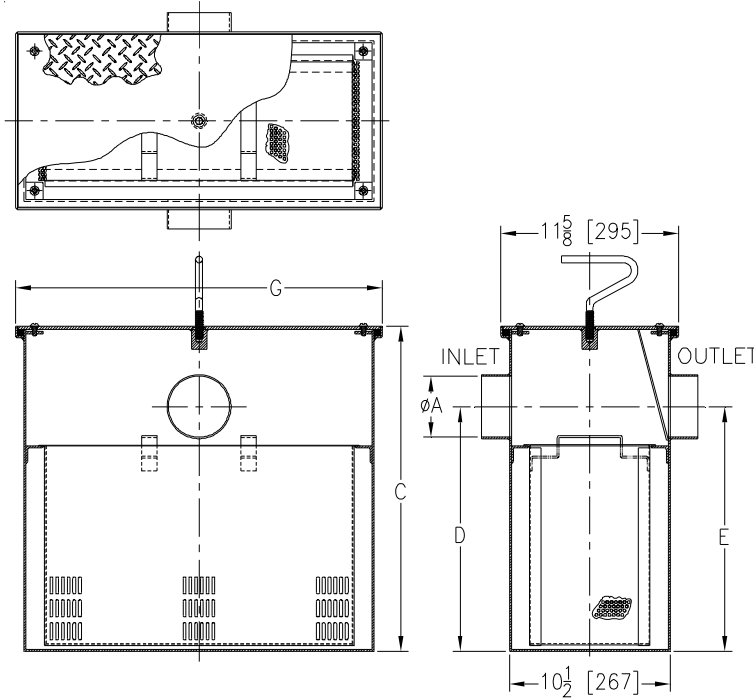

ENGINEERING SPECIFICATION:
ZURNZ1183-FC-83

Large capacity acid resistant coated interior and exterior fabricated steel, or stainless steel solids interceptor, with 4 [102] connections for recessed installation with screen attached to gasketed, non-skid secured cover with removable lift handle, and removable sediment basket. Size to be used with corresponding Z1170, Z1172 or Z1173 Grease Interceptors.

| Size | 'A' Inlet/Outlet Size | Flow Rate G.P.M. [L] | Solids Cap. Cubic Ft. [m ³] | Dimension in Inches | | |
|------|-----------------------|----------------------|-----------------------------------------|---------------------|--------------|----------|
| | | | | C | G | D/E |
| 800 | 4 [102] | 50 [189] | 1.35 [.038] | 21-1/8 [546] | 24-3/8 [649] | 16 [406] |

OPTIONS (Check/specify appropriate option)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -CS Custom Screens (Specify material and perforation size required)
- ___ -E Acid Resistant Coated Interior and Exterior Fabricated Steel Extension Section.
- ___ -YR Replacement Stainless Steel Bucket Assembly

| | | |
|-----------------------------------------|----------------|-----------------|
| REV. | DATE: 06/15/11 | C.N. NO. 121424 |
| DWG. NO. 306287 PRODUCT NO. Z1183-FC-83 | | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED