





Z1186-119

OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND OIL LEVEL SENSOR


SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

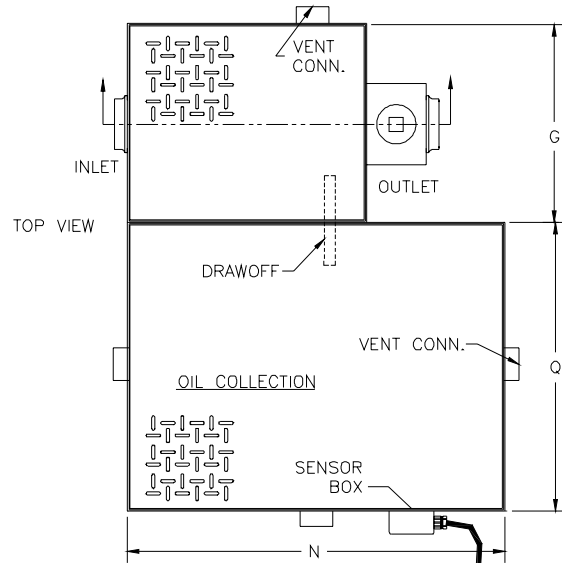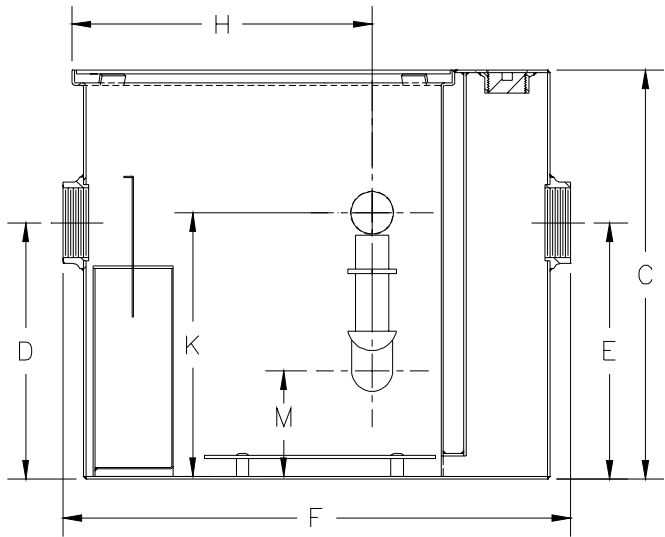

R = DEPTH OF STORAGE TANK
 S = HEIGHT OF SENSOR FROM BOTTOM OF TANK



SIZE	Inlet/Outlet Size	Flow Rate G.P.M.	Water Cap. Gal.[1]	Approx. Wt. Lbs.[kg]	Tank Cap. Gal.[1]
600	6 [152]	25 [95]	21 [42]	320 [145]	110 [416]

Dimensions In Inches [mm]											
SIZE	C	D/E	F	G	H	K	M	N	Q	R	S
600	49 1/4 [1251]	13 1/4 [337]	27 1/2 [699]	17 1/4 [438]	16 [406]	15 1/4 [387]	6 1/4 [159]	50 3/4 [1289]	15 [381]	78 [1981]	33 [838]

ENGINEERING SPECIFICATION: ZURN Z1186-119 Acid Resistant Coated interior and exterior fabricated steel oil interceptor with integral extension, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank complete with a fiberglass sensor box containing an electronic oil level sensor, a fiberglass display box with one green power light and one red oil level light, audio alarm and junction box. Regularly furnished with inlet and outlet in high position.

- Note: 1. Power supply 120V GFCI
 2. Recommended Installations: Sitting on the floor or recessed in a pit only. (A pit installation requires that a drain or sump pump be installed to keep the pit relatively dry).

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

REV. A	DATE: 5/19/04	C.N. NO. 92233
DWG NO. P-15045	PRODUCT NO. Z1186-119	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED