




Z1186-125

OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND OIL LEVEL SENSOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

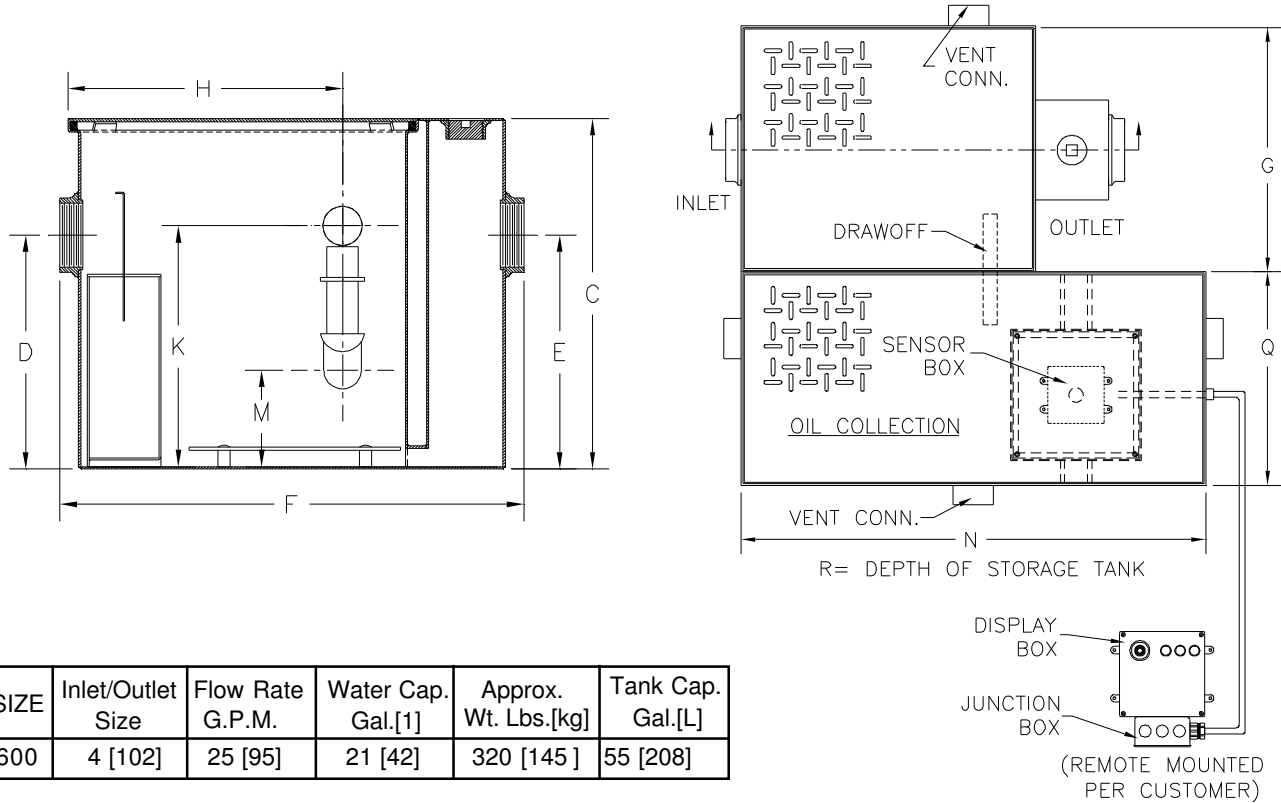

SIZE	Inlet/Outlet Size	Flow Rate G.P.M.	Water Cap. Gal.[1]	Approx. Wt. Lbs.[kg]	Tank Cap. Gal.[L]
600	4 [102]	25 [95]	21 [42]	320 [145]	55 [208]

Dimensions In Inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
600	203/4[527]	113/4[298]	271/2[699]	171/4[438]	16 [406]	151/4[387]	6 1/4 [159]	503/4[1289]	203/8[517]	27 1/4 [692]

ENGINEERING SPECIFICATION: ZURN Z1186-125 Acid Resistant Coated interior and exterior fabricated steel oil interceptor with integral extension, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff, vent connections, and integral storage tank. Secured gasketed non-skid cover complete with flow control fitting. With a fiberglass sensor box containing a float oil level sensor, a fiberglass display box with one green power light and one red oil level light, audible alarm and junction box. Regularly furnished with inlet and outlet in high position.

Note: 1. Power supply 120V GFCI

2. Recommended Installations: Sitting on the floor or recessed in a pit only. (A pit installation requires that a drain or sump pump be installed to keep the pit relatively dry).

OPTIONS (Check/specify appropriate options)

PREFIXES

____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

____ **-HD** Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 3/2/07	C.N. NO. 96270
DWG NO. P-15387	PRODUCT NO. Z1186-125	

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292