


Z-1186-99 OIL INTERCEPTOR

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

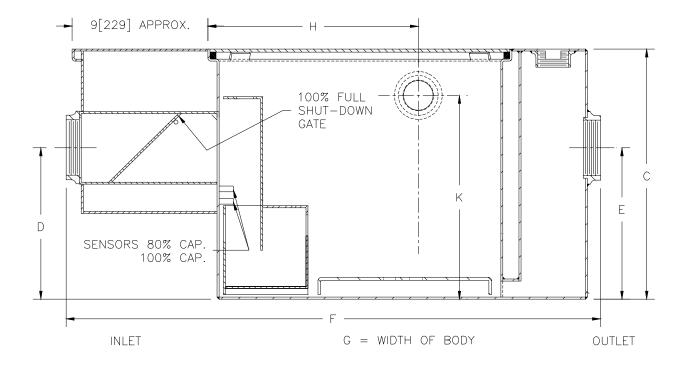

Size	Inlet/Outlet Flow Rate Size** G.P.M.[L]	Flow Rate	Water Capacity Gal. [L]	Approx. Wt. Lbs.[kg]	Dimensions In Inches						
		G.P.M.[L]			с	D	E	F	G	н	к
700	3 [75]	35 [132]	21 [79]	140 [64]	30 1/2[774]	26[660]	26[660]	38 7/8[987]	19 7/8[505]	16 3/8[416]	27 1/8[689]

ENGINEERING SPECIFICATION: ZURN Z-1186-99 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting, capacitance sensors at 80% and 100% capacity, shutdown gate and alarm/display panel. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

Acid Resistant Coated Fabricated Steel*

SUFFIXES

- -E Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- **----- -K** Anchor flange 1-3/4" down from top and 2" wide. A 3" minimum extension height required when anchor flange (-K) option is specified.
- - ** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #700 will have connections reduced to 3" as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

	REV. DATE: 6/30/98 C.N. NO. 80767								
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO. P-14649 PRODUCT NO. Z-1186-99								
ZURN INDUSTRIES, INC.									

Phone: 814/455-0921 + Fax: 814/454-7929 + World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292