




Z625-78

ISOLATION DECK ADJUSTABLE DRAIN WITH OVERFLOW STRAINER AND DOME TOP

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

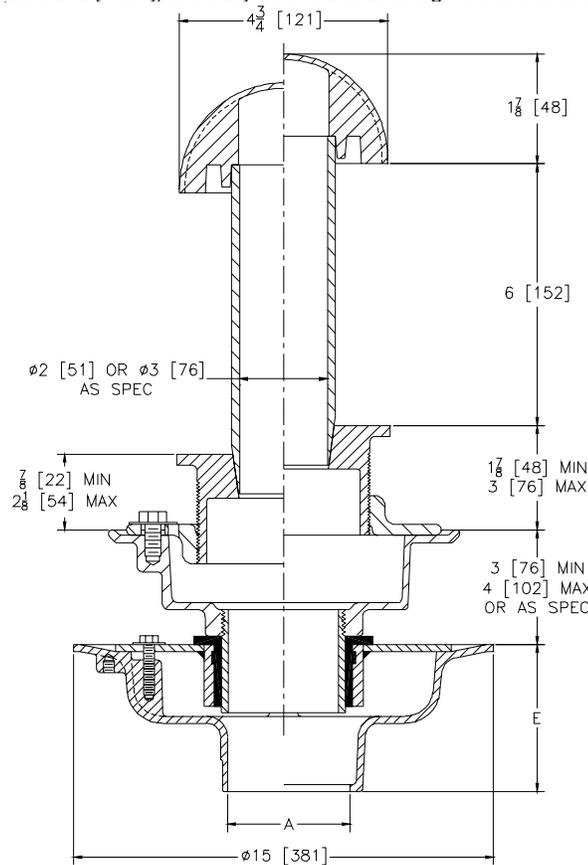

A- Pipe Size In.	Approx. Wt. Lbs. [kg]
2-3-4 [50-75-100]	42 [19]
5-6 [125-150]	

ENGINEERING SPECIFICATION: ZURN ZN625-78 Adjustable isolation deck drain, Dura-Coated cast iron upper and lower bodies, upper and lower clamp collars, neoprene flex gasket, isolation nipple and adjustable nickel bronze strainer top with 6 [152] high solid standpipe and polished dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2 thru 6 [50 thru 150]	___ IC Inside Caulk	5 1/4 [133]
2 thru 4, 6 [50 thru 100, 150]	___ IG Inside Caulk w/Sealtrol Gskt.	5 1/4 [133]
2 thru 6 [50 thru 150]	___ IP Threaded	3 3/4 [95]
2 thru 6 [50 thru 150]	___ NH No-Hub	5 1/4 [133]
2 thru 4 [50 thru 100]	___ NL Neo-Loc	4 5/8 [117]

PREFIXES

- ___ ZB D.C.C.I Body w/Polished Bronze Top
- ___ ZN D.C.C.I Body w/Polished Nickel Bronze Top*

SUFFIXES

- | | |
|------------------------------|--|
| ___ -C Underdeck Clamp | ___ -SD Longer Standpipe (Specify Height Required) |
| ___ -G Galvanized Cast Iron | ___ -SS Stainless Mesh Screen Over Dome And Standpipe |
| ___ -LD (Less) Dome | ___ -U 3" [76] High Extension Adapter (See Z-400 Series) |
| ___ -PS Perforated Standpipe | |
| ___ -R Sump Receiver | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 2/20/03	C.N. NO. 90279
DWG. NO. P-14968		PRODUCT NO. Z625-78