




Z-100-128 15" DIAMETER MAIN ROOF DRAIN

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

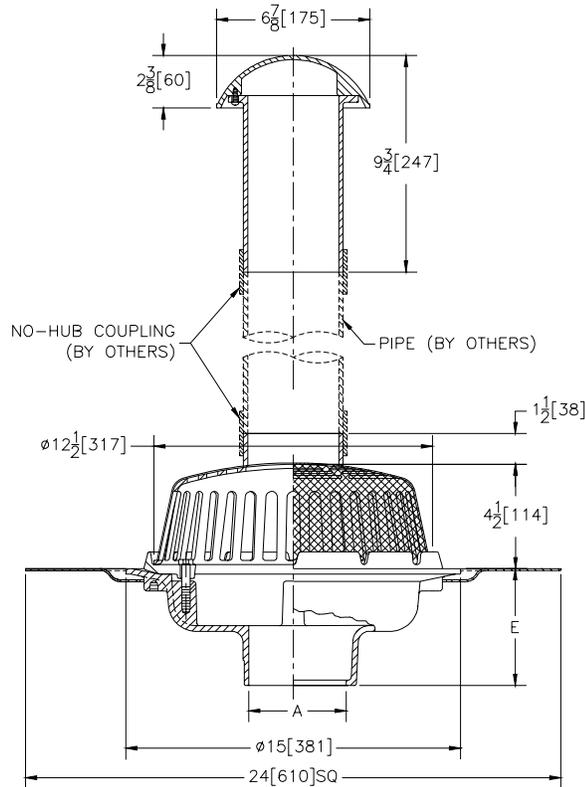

A- Pipe Size In.	Approx. Wt. Lbs.[kg]	Dome Open Area Sq. In.[cm ²]
2,3,4 [50,75,100]	41 [19]	103[665]
6 [152]	42 [19]	

SUFFIXES

- _____ -BS Bronze Mesh Screen Over Dome
- _____ -E Static Extension 1[25] thru 4[100] (Specify Height)
- _____ -EA Adjustable Extension Assembly 1 3/4[44] thru 3 1/2[89]
- _____ -G Galvanized Cast Iron
- _____ -GD Galvanized Cast Iron Dome
- _____ -S Secondary Clamp Collar
- _____ -VP Vandal Proof Secured Dome
- _____ -XJ Vertical Expansion Joint (See Z-190)

ENGINEERING SPECIFICATION: ZURN Z-100-128 15[381] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/ gravel guard, low silhouette dome, roof sump receiver and Dura-Coated cast iron Sanitary Vent Terminal Cap with dome.

OPTIONS (Check/specify appropriate options)

PREFIXES

- _____ ZA- D.C.C.I. Body with Aluminum Dome
- _____ ZC- D.C.C.I. Body with Cast Iron Dome *
- _____ ZRB- D.C.C.I. Body with Plain Bronze Dome

OUTLET (Specify type)

- _____ IC Inside Caulk
- _____ IG Inside Caulk w/Sealtrol Gskt.
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

PIPE SIZE (Specify size)

- _____ 2,3,4,6 [50,75,100,150]
- _____ 2,3,4,6 [50,75,100,150]
- _____ 2 thru 6 [50 thru 150]
- _____ 2,3,4,6 [50,75,100,150]
- _____ 2 thru 6 [50 thru 150]

'E' BODY HT. DIMENSION

- 5 1/4 [133]
- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

REV. DATE: 04/25/96 C.N. NO. 75000

DWG. NO. P-14316 PRODUCT NO. Z-100-128

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292