




Z1186-ST-95

SIZE 500 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

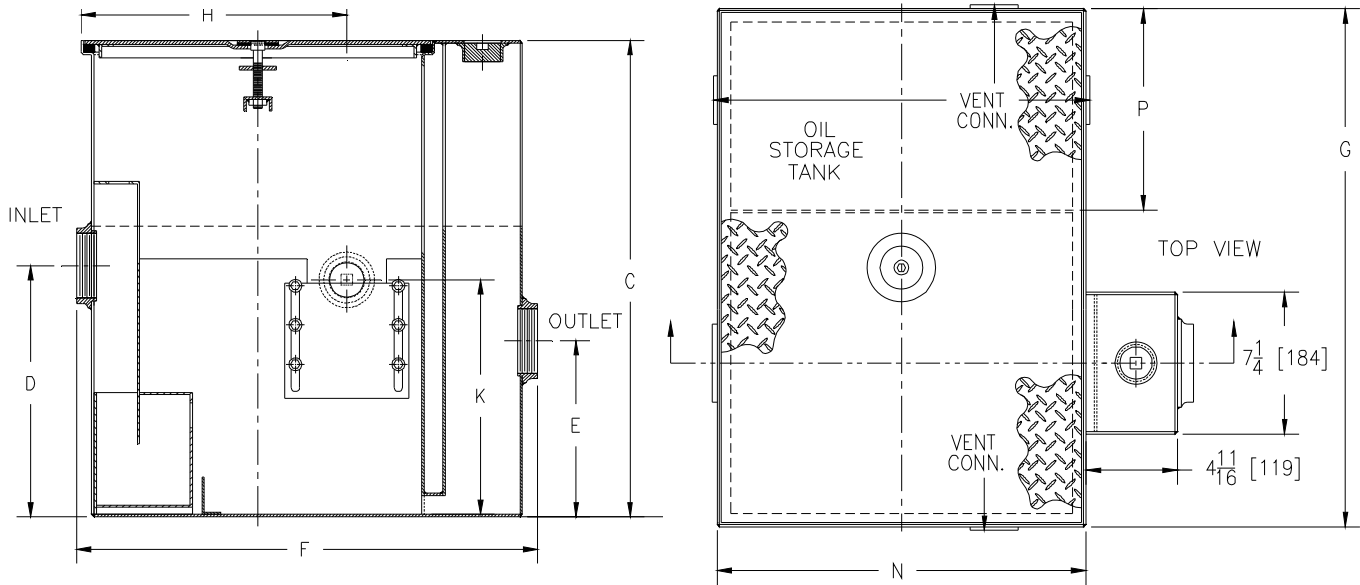

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	P
500	3 [76]	20 [76]	10 [38]	115 [52]	10 5/16 [262]

Dimensions in inches [mm]								Oil Storage Tank Capacity Gal.[L]	No. of Covers	
SIZE	C	D	E	F	G	H	K			N
500	25 3/8 [645]	13 3/8 [340]	9 3/8 [238]	25 1/16 [673]	26 1/2 [673]	14 3/16 [360]	12 1/2 [318]	18 7/8 [479]	8 [30]	1

ENGINEERING SPECIFICATION: ZURN Z1186-ST-95

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with built-in integral extension section, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ **-HD** Heavy duty traffic cover rated at 10,000 lbs. [4536kg] maximum safe live load.
- _____ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- _____ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- _____ **-STR** Storage tank on right hand side when facing the inlet.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 3/18/10	C.N. NO. 110870
DWG NO. P-15874	PRODUCT NO. Z1186-ST-95	