




# Z512-79

## 12 [305] HEAVY-DUTY DRAIN W/ SQUARE TOP & HINGED GRATE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

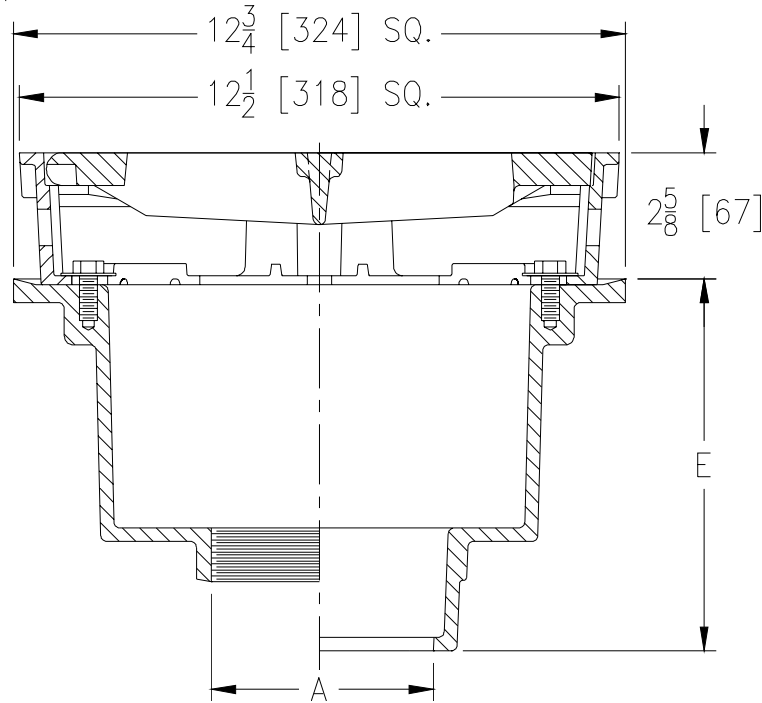

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
3-4 [76-102]	44 [20]	40 [258]

**ENGINEERING SPECIFICATION: ZURN Z512-79**

12 [305] Square top heavy-duty drain, Dura-Coated cast iron deep sump body with bottom outlet, seepage pan and combination flashing clamp and frame for heavy-duty cast iron hinged slotted grate.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 3-4 [76-102]
- 3-4 [76-102]
- 3 [76]
- 4 [102]
- 3-4 [76-102]

(Specify size/type) **OUTLET**

- \_\_\_ IC Inside Caulk
- \_\_\_ IG Inside Caulk w/Sealtrol Gskt.
- \_\_\_ IP Threaded
- \_\_\_ IP Threaded
- \_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 7 3/4 [197]
- 7 3/4 [197]
- 6 [152]
- 6 1/4 [159]
- 7 1/4 [184]

**PREFIXES**

- \_\_\_ Z D.C.C.I. Body and Top\*
- \_\_\_ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 5/8 [67] Dim.)
- \_\_\_ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 5/8 [67] Dim.)

**SUFFIXES**

- \_\_\_ -DG Duresist Grate
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -S Secondary Strainer
- \_\_\_ -SS Stainless Mesh Liner for Bucket
- \_\_\_ -TC Neo-Loc Test Cap Gasket (3 -4 [76 - 102] NL Bottom Outlet Only)
- \_\_\_ -TS Top Secured with Slotted Screws
- \_\_\_ -V Backwater Valve (4 [102] IC & IP only)
- \_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_ -Y Sediment Bucket
- \_\_\_ -90 90° Threaded Side Outlet Body

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 12/6/06	C.N. NO. 92559
<b>DWG. NO. P-15083 PRODUCT NO. Z512-79</b>		