




Z-1185-80 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

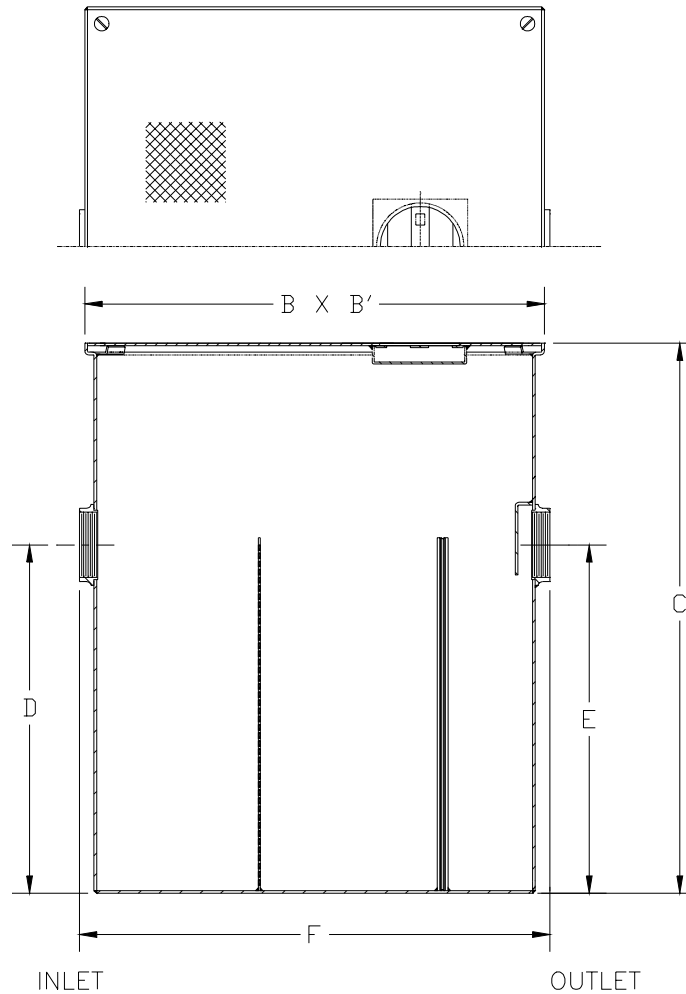

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
20	4 [100]	200 [756]	554 [251]	40 [1016]	40 [1016]	48 [1219]	32 [813]	32 [813]	41 [1041]

ENGINEERING SPECIFICATION: ZURN Z-1185-80 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ RS- Stainless Steel Screen Replacement Assembly

REV.	DATE: 2/5/98	C.N. NO. 79611
DWG. NO. P-14595 PRODUCT NO. Z-1185-80		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED