




Z1188-119

LARGE CAPACITY OIL INTERCEPTOR W/INTEGRAL STORAGE TANK, & DOUBLE WALL CONTAINMENT TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

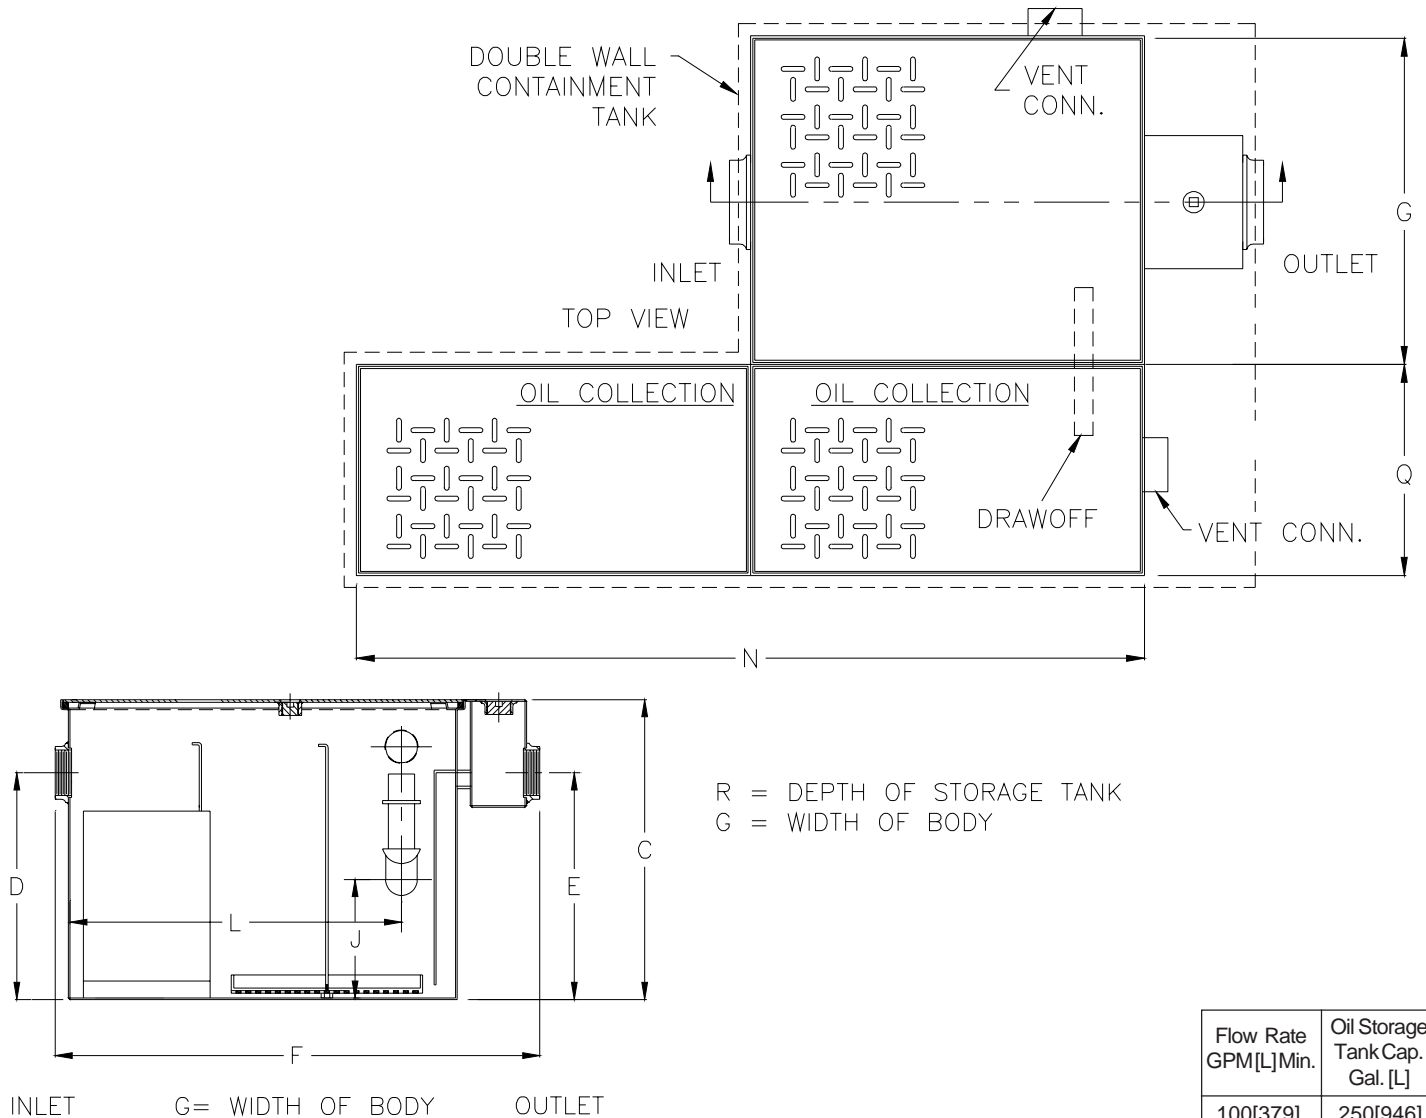

Flow Rate GPM[L]Min.	Oil Storage Tank Cap. Gal. [L]
100[379]	250[946]

Flow Rate GPM[L]Min	Inlet/Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	No. of Covers	Dimensions In Inches								
					C	D/E	F	G	J	L	N	Q	R
100[379]	3[75]	110[416]	432[196]	1	27[686]	23[584]	42 3/4[1086]	33 5/8[854]	10 [254]	30 1/8[765]	104[2642]	46[1168]	27[686]

ENGINEERING SPECIFICATION: ZURN Z1188-119 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid cover complete with flow control fitting and integral storage tank, and double wall containment tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

— Z Acid Resistant Coated Fabricated Steel*

REV.	DATE: 3/28/03	C.N. NO. 90985
DWG. NO. P-14983	PRODUCT NO. Z1188-119	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED