




Z415P-75

SPECIFICATION SHEET

BODY ASSEMBLY W/ "TYPE P" ADJUSTABLE HEAD WITH GROUND JOINT PLUG AND CHAIN

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

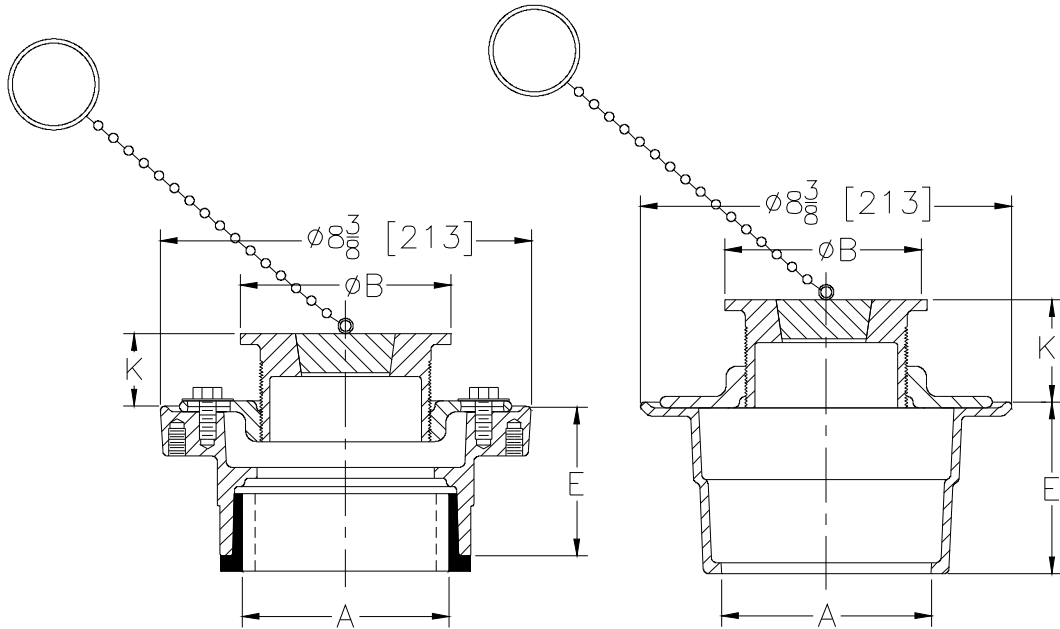

Dimensions In Inches						Approx. Wt. Lbs. [kg]
A - Pipe Size	B - Dia.	K		K'		
		Min.	Max.	Min.	Max.	
2-3-4 [51-76-102]	2 [51]	7/8 [22]	2 1/8 [54]	1 7/8 [48]	3 [76]	15 [7]
2-3-4 [51-76-102]	3 [76]	7/8 [22]	2 1/8 [54]	1 7/8 [48]	3 [76]	17 [8]

ENGINEERING SPECIFICATION: ZURN Z415P-75 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with polished stainless steel ground joint plug and chain.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- ___ IC Inside Caulk
- ___ IP Threaded
- ___ IP Threaded
- ___ IP Threaded
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIM.

- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [67]
- 2 7/8 [73]
- 3 7/8 [98]
- 4 5/8 [117]

PREFIXES

- ___ ZB D.C.C.I. Body Assembly w/Polished Bronze Top
- ___ ZN D.C.C.I. Body Assembly w/Polished Nickel Bronze Top*

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Cast Iron
- ___ -G Galvanized Cast Iron
- ___ -LC (Less) Chain
- ___ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- ___ -U 1 - 3 [25 - 76] High Extension Adapter

REV. A	DATE: 6/24/04	C.N. NO. 92313
DWG. NO. P-14952 PRODUCT NO. Z415P-75		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED