




Z1171-85

LOW PROFILE GREASE INTERCEPTOR W/ 45.5 [1156] HEIGHT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

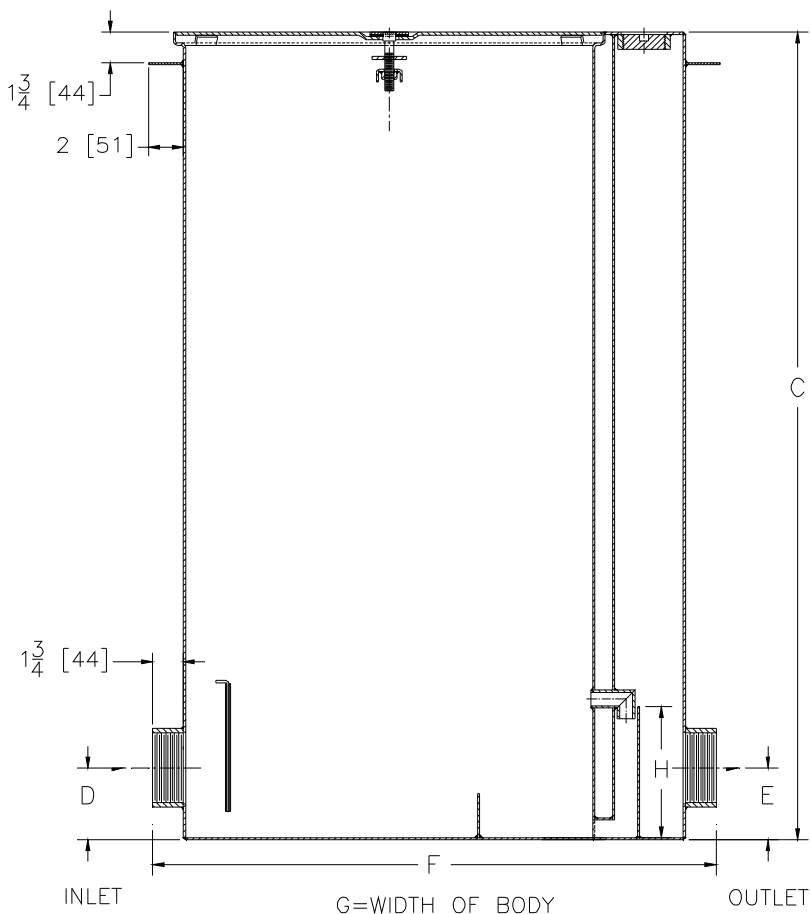

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
800	3* [76]	50 [189]	45 [170]	100 [45]	374 [170]	45 1/2 [1156]	10[254]	49-1/2 [1257]	29-3/8 [746]	10[254]

ENGINEERING SPECIFICATION: ZURN Z1171-85 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, visible double wall trap seal, and integral extension with anchor flange. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] low inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

SUFFIXES

- ___ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- ___ -PW Plug Wrench

REV.	DATE: 12/15/11	C.N. NO. 122552
DWG. NO. 308421		PRODUCT NO. Z1171-85

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED