
SPECIFIC	<b>ATION</b>	SHEET
----------	--------------	-------

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

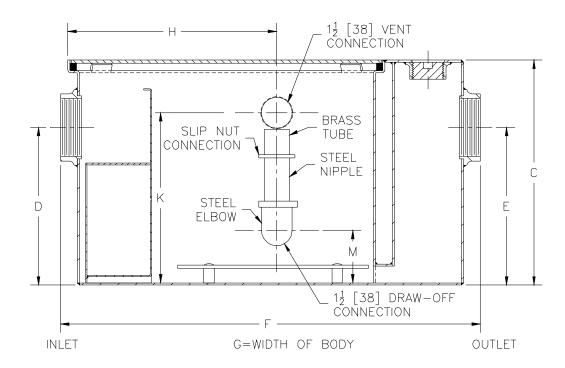

Size	Inlet/ Flow Outlet Rate Size GPM [L]	Water Approx. Cap. Wt.Lbs. Gal. [L] [kg]	1-1	Differsions in inches							
			С	D/E	F	G	Н	K	М		
800	4[102]	50 [189]	30 [114]	171[78]	24-1/4 [616]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]	17-1/4 [438]	21-1/4 [540]	6-7/16 [164]

## **ENGINEERING SPECIFICATION: ZURN Z1186-135**

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

Note: Location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

-E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
 -HD Heavy duty traffic cover rated at 10,000 lbs. [4536] Kg. maximum safe live load. A 3 [76] minimum extension height is required when heavy-duty cover (-HD) option is specified. (Specify 'C' Dim. height required.)

-K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)

-KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.

Date: 10/26/15 C.N. No. 133356

Prod. | Dwg. No. Z1186-135

<sup>\*</sup> Regularly furnished unless otherwise specified.