




Z1185-155

LINT INTERCEPTOR SIZE 3 WITH 6 [152] INLET/OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

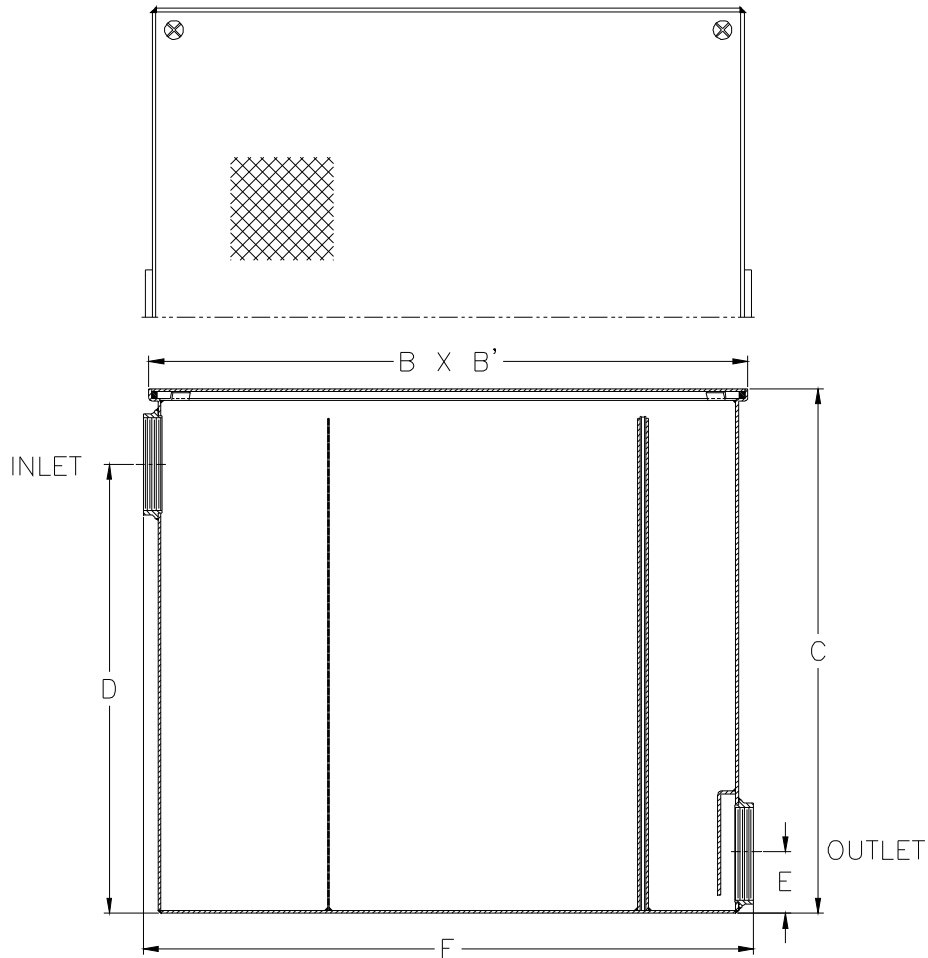

Size - No. of Machines	Inlet/Outlet size	Flow Rate GPM [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				B	B'	C	D	E	F
3	6 [152]	30 [114]	93 [42]	17 [432]	17 [432]	16-1/2 [419]	11-1/2 [292]	5 [127]	17-1/4 [438]

ENGINEERING SPECIFICATION: ZURN Z1185-155

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8" [10 mm] diameter perforated holes. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).

___ -RS Stainless Steel Screen Replacement Assembly

* Regularly furnished unless otherwise specified.