




Z1185-154

LINT INTERCEPTOR WITH 70 GPM CAPACITY,
13" [330] EXTENSION AND REMOVABLE BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

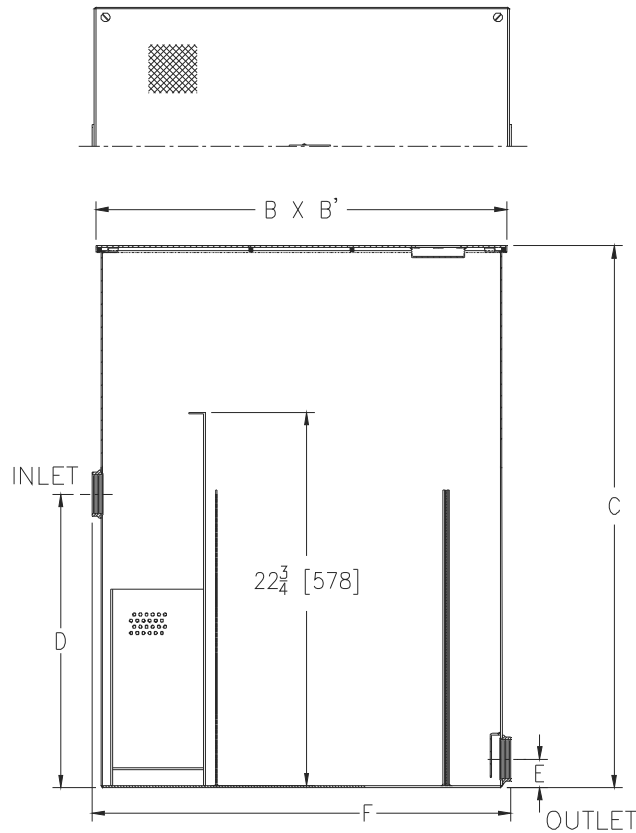

Size No. of Machines	Inlet/Outlet Size in [mm]	Flow Rate G.P.M. [LPM]	Approx. Wt. Lbs. [kg]	Dimensions In Inches [mm]					
				B	B'	C	D	E	F
7	3 [76]	70 [265]	155 [70]	25 [635]	25 [635]	33[838]	15-3/4 [400]	3-1/4[82]	25-1/2[648]

ENGINEERING SPECIFICATION: ZURN Z1185-154

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover with removable lift handle, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8" [10 mm] diameter perforated holes. Regularly furnished with high inlet and low outlet. Note: size #7 covers are not furnished with a lift handle.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ____ Z Acid Resistant Coated Fabricated Steel*
- ____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____ -RS Aluminum Screen Replacement Assembly

* Regularly furnished unless otherwise specified.