




Z326-76

INDIRECT WASTE FUNNEL W/ FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

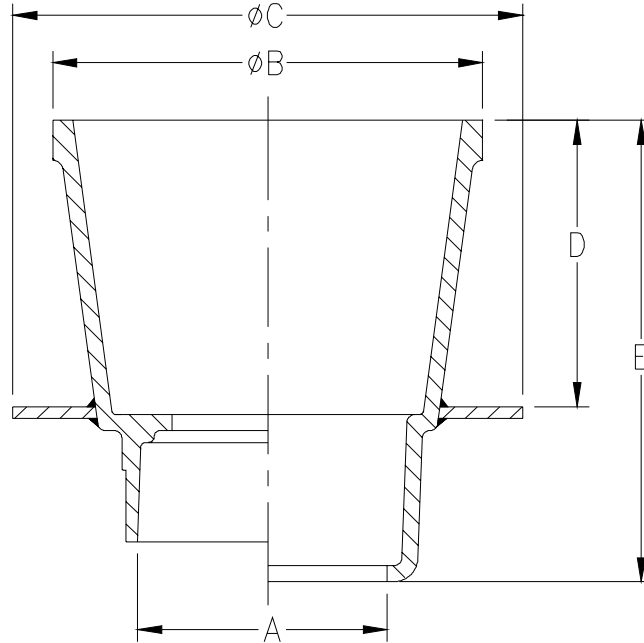

Dimensions In Inches				Approx. Wt. Lbs. [kg]
A Pipe Size	B	C	D	
2 [51]	6 3/4 [171]	8 [203]	4 1/2 [114]	7 [3]
3 [76]	6 3/4 [171]	8 [203]	4 1/2 [114]	9 [4]
4 [102]	8 5/8 [219]	10 [254]	6 1/2 [165]	11 [5]
6 [152]	8 5/8 [219]	10 [254]	6 1/2 [165]	12 [5]

ENGINEERING SPECIFICATION: ZURN Z326-76
7 [178] or 9 [229] Diameter Indirect Waste funnel with
Dura-Coated cast iron body with flange and bottom outlet.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2-3 [51-76]
- 4-6 [102-152]
- 2-3 [51-76]
- 4-6 [102-152]
- 2-3 [51-76]
- 4-6 [102-152]
- 2-3 [51-76]
- 4 [102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IC Inside Caulk
- _____ IG Inside Caulk w/Sealtrol Gskt.
- _____ IG Inside Caulk w/Sealtrol Gskt.
- _____ IP Threaded
- _____ IP Threaded
- _____ NL Neo-Loc
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 7 1/4 [184]
- 9 7/8 [251]
- 7 1/4 [184]
- 9 7/8 [251]
- 7 1/4 [184]
- 9 7/8 [251]
- 6 5/8 [168]
- 9 [229]

PREFIXES

- _____ Z D.C.C.I Body*
- _____ ZARB Plain Bronze Body

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -DB Bottom Dome Strainer
- _____ -G Galvanized Cast Iron
- _____ -S Secondary Strainer
- _____ -TC Neo-Loc Test Cap Gasket
(2 - 4 [51 - 102] NL Bottom Outlet Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 2/14/05	C.N. NO. 91798
DWG. NO. P-15128 PRODUCT NO. Z326-76		