


Z1172-108 LARGE CAPACITY GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

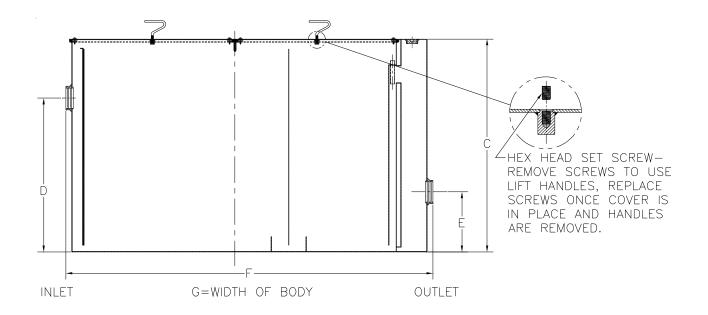

	Inlet/	Flow Rate	Capacity		s v	Approx.	Dimensions in Inches				
Size	Outlet	G.P.M.	Water	Grease	ver	VVI. LOO.					
	Size**	[L]	Gal. [L]	Lbs. [kg]	2 ပိ	[kg]	С	D	E	F	G
1600	6 [152]	350 [1323]	865 [3278]	700 [318]	2	2096 [951]	50 1/2 [1283]	36 1/2 [927]	14 1/4 [362]	87 [2210]	63 5/8 [1616]

ENGINEERING SPECIFICATION: ZURN Z1172-108

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 350 GPM [1323] Liter and 700 Lbs. [318] kg. grease capacity with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles and enzyme port having bronze plug, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _ -CC 8 [203] Diameter Cleanout Cover
- -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- -HD Heavy duty traffic cover rated at 10,000 lbs. [4536] kg. maximum safe live load.
- _____ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- _____ -L Angle type (Z1108-L) flow control device.

	REV. A	DATE: 07/31/07	C.N. NO. 97053
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-14630	PRODUCT NO. Z1172-108
ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OF Phone: 814\455-0921 ♦ Fax: 814\454-7929 ♦ In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississ	World Wide W	eb: www.zurn.com	