




# Z1170-154

## SIZE 600 GREASE INTERCEPTOR W/ 4 [102] INLET/ OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

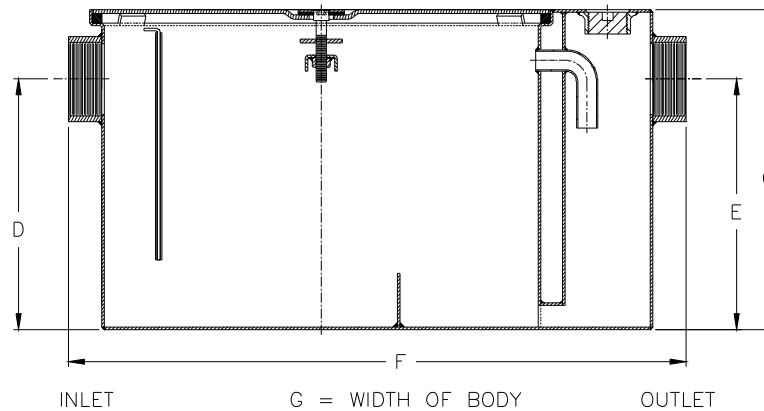

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [LPM]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
600	4 [102]	25 [94]	21 [79]	50 [23]	124 [56]	17-1/2 [446]	13 [330]	32-1/4 [819]	19-7/8 [505]

### ENGINEERING SPECIFICATION: ZURN Z1170-154

Acid Resistant Coated interior and exterior fabricated steel grease interceptor, PDI, rated at 25 GPM [94LPM] and 50 Lbs [23 kg]. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection. Note: Location of outlet from bottom of interceptor cannot be changed.

### PREFIXES

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS All Type 304 Fabricated Stainless Steel

### SUFFIXES

- \_\_\_ -AL Aluminum Cover
- \_\_\_ -DI Dual High/Low Inlet
- \_\_\_ -E Acid Resistant Coated Interior and exterior integral fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- \_\_\_ -ER Acid Resistant Coated Interior and exterior fabricated retrofit steel extension.
- \_\_\_ -HD Heavy-Duty cover rated at 10,000 lbs. [4536kg] maximum safe live load. A 3 [76] minimum extension height is required when Heavy-Duty cover (-HD) option is specified.
- \_\_\_ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- \_\_\_ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified.
- \_\_\_ -L Angle type (Z1108-L) flow control device with plunger.
- \_\_\_ -R Acid resistant coated interior and exterior fabricated steel recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- \_\_\_ -RE Acid resistant coated interior and exterior fabricated steel recessing receiver enclosed type for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- \_\_\_ -T Cover recessed for tile/terrazo. A 3 [76] minimum extension height is required. (Specify recess depth- 1/8 [3], 3/4 [19], or 1-1/4 [32]).

\* Regularly furnished unless otherwise specified.