




Z-100-134
15" [381] DIAMETER MAIN
ROOF DRAIN WITH
EXPANDED METAL DOME

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

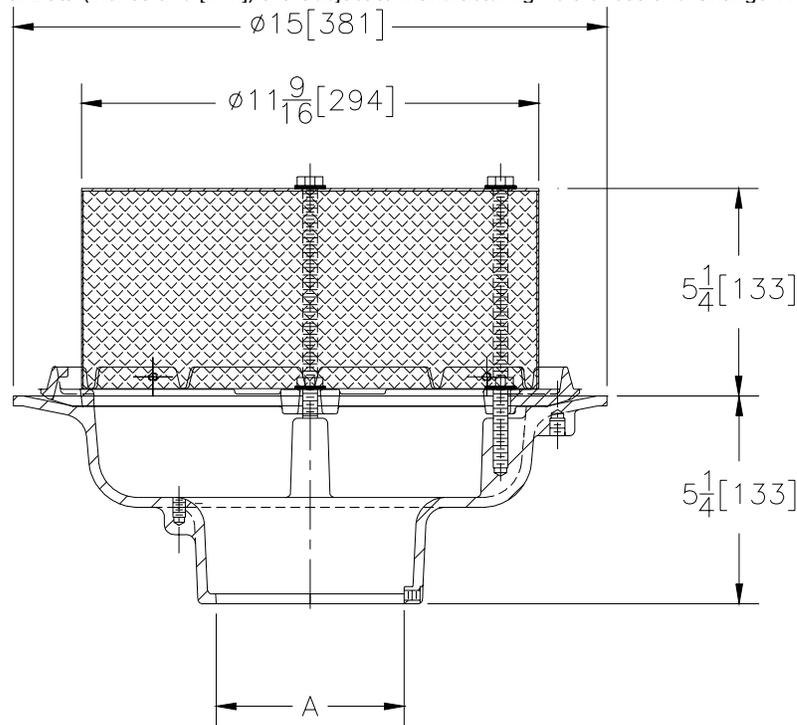

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2-3-4 [50-75-100]	44 [20]	103 [665]
6 [150]	45 [20]	

ENGINEERING SPECIFICATION: ZURN Z-100-134 15 [381] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and galvanized 7 gage-3/4" expanded metal roof drain guard.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4,6 [50,76,101,152]
- 2,3,4,6 [50,76,101,152]
- 2 thru 6,[50 thru 152]
- 2,3,4,6 [50,76,101,152]
- 2 thru 6 [50 thru 152]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside caulk w/Sealtrol Gskt.
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

E BODY HT. DIM.

- 5 1/4 [133]
- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

PREFIXES

- _____ Z- D.C.C.I. Body with Guard*

SUFFIXES

- | | |
|---|---|
| _____ -AC Angular Underdeck Clamp | _____ -R Roof Sump Receiver |
| _____ -AR Acid Resistant Epoxy Coated Finish | _____ -SC Secondary Clamping Collar |
| _____ -C Underdeck Clamp | _____ -XJ Vertical Expansion Joint (See Z-190) |
| _____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.) | _____ -84 Stainless Steel Perforated Gravel Guard |
| _____ -EA Adjustable Extension Assembly | _____ -89 2 [51] High External Water Dam |
| _____ 1 3/4 [44] thru 3 1/2 [89] | _____ -90 90° Threaded Side Outlet Body |
| _____ -ES Static Extension With Secondary Clamp | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 09/27/96	C.N. NO. 76085
DWG. NO. P-14389 PRODUCT NO. Z-100-134		

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292