




Z415-156

BODY ASSEMBLY W/ STAINLESS STEEL
PERFORATED EXTENSION AND NO-HUB ADAPTER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

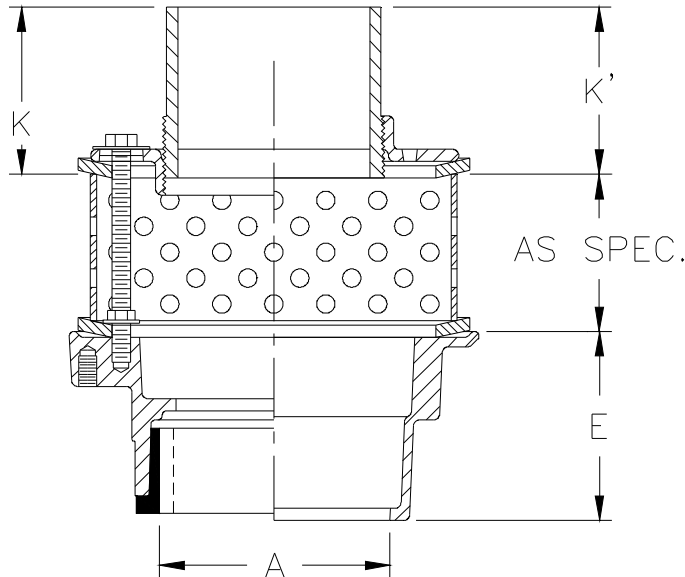

Dimensions In Inches [mm]					Approx. Wt. Lbs. [kg]
A Pipe Size	K		K'		
	Min.	Max.	Min.	Max.	
2,3,4 [51,76,102]	2-1/8 [54]	3 [76]	3-1/8 [79]	4 [102]	15[7]

ENGINEERING SPECIFICATION: ZURN Z415-156

Hub drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, stainless steel perforated extension, secondary clamp collars, and Z1040 No-Hub adapter.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 3-7/8 [98]
- 3-7/8 [98]
- 2-5/8 [67]
- 2-7/8 [73]
- 2-3/8 [60]
- 2-3/4 [70]
- 3-7/8 [98]
- 3-3/4 [95]

PREFIXES

- _____ Z D.C.C.I. Body Assembly

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -G Galvanized Cast Iron
- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -SR Stabilizer Ring
- _____ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)
- _____ -U 1 - 3 [25 - 76] High Extension Adapter
- _____ -18 Leveling Ring (See Z400-18)
- _____ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified.
Assembly (2 [51], 3 [76] Only).