



# Z415S-DP-104


BODY ASSEMBLY W/ "TYPE S" STRAINER, DECK PLATE & 8 [203] SQUARE TOP ASSEMBLY

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

**PATENT  
PENDING**

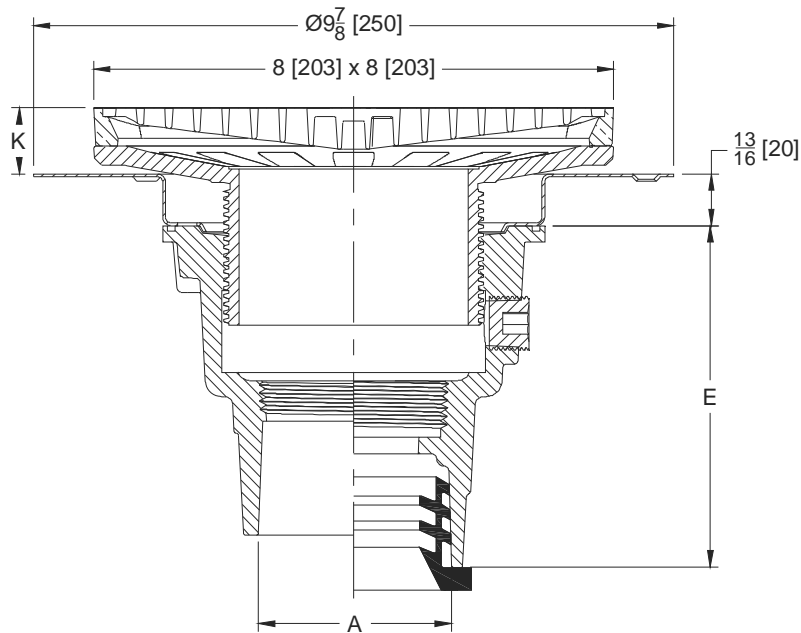

Dimensions In Inches			Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In [cm <sup>2</sup> ]
A	K			
Pipe Size	Min.	Max.		
2, 3, 4 [51, 76, 102]	1 [25]	1-7/16 [37]	12 [5]	9 [58]

**ENGINEERING SPECIFICATION: Z415S-DP-104**

Zurn floor and shower drain, Dura-Coated cast iron body with bottom outlet, stainless steel deck plate, and "Type S" 8" [203mm] x 8" [203mm] polished nickel bronze frame & grate, with Cast Iron top assembly.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2 [51]
- 3 [76]
- 4 [102]
- 2 [51]
- 3 [76]
- 4 [102]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc
- \_\_\_\_\_ NL Neo-Loc
- \_\_\_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 4-7/8 [124]
- 4-3/4 [121]
- 4 [102]
- 5-1/4 [133]
- 4-3/8 [111]
- 4-3/8 [111]

**PREFIXES**

- \_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- \_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*
- \_\_\_ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

**SUFFIXES**

- \_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron
- \_\_\_ -CC Stainless Steel Clamp Collar
- \_\_\_ -EF 3/4 [19] Extension Frame
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -P Trap Primer Connection (1/2" [13])
- \_\_\_ -SA Stabilizer Assembly for Sub-Floor Install (See Z1035)
- \_\_\_ -SQ Stabilizer Assembly for Steel Decking Install (See Z1035-Q)
- \_\_\_ -SR Stabilizer Ring Assembly for On-Deck Install
- \_\_\_ -TC Neo-Loc Test Cap Gasket (2-3-4 [51-76-102] NL Outlet Only)
- \_\_\_ -U 2 - 3-1/4 [51-83] High Extension Adapter
- \_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.