



Z1186-ST-84 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG ____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

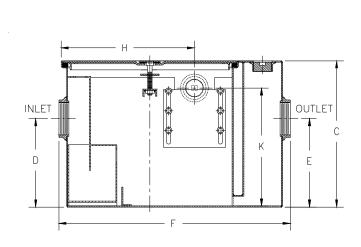

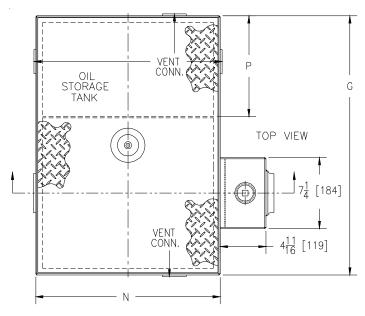

SIZE	Inlet/Outlet Size	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Р
400	4 [102]	15 [57]	9 [34]	95 [43]	10 1/8 [257]

	Dimensions in inches [mm]							Oil Storage Tank	No. of
SIZE	С	D/E	F	G	Н	K	N	Capacity Gal.[L]	Covers
400	14 [356]	9 1/4 [235]	23 1/16 [586]	23 9/16 [598]	12 1/16 [306]	11 [279]	16 7/8 [429]	6 [22]	1

ENGINEERING SPECIFICATION: ZURN Z1186-ST-84 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES Z	Acid Resistant Coated Fabricated Steel*
SUFFIXES	
E	Acid Resistant Coated interior and exterior fabricated steel section. (Specify 'C' Dim. required) for recessed installation
HD	Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.
K	Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
KC STR	Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. Storage tank on right hand side when facing the inlet.

REV.

DATE: 10/12/06

C.N. NO. 91160

DWG NO. P-15338

PRODUCTNO.Z1186-ST-84