




Z-543-84

16 [406] DIAMETER HEAVY DUTY DRAIN WITH EXTENSION FRAME

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

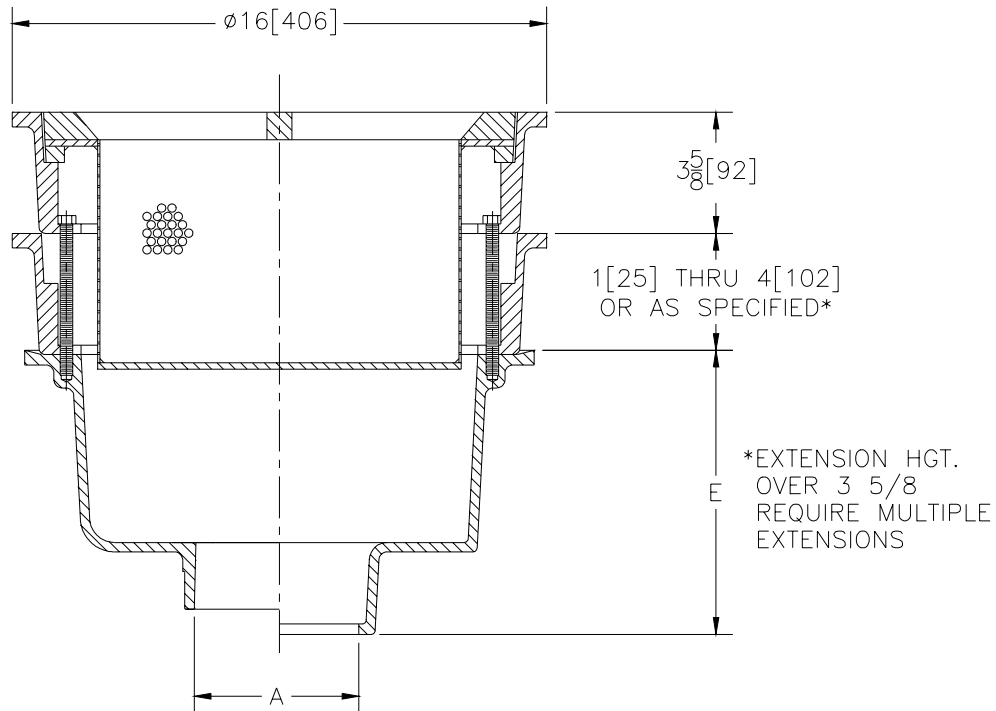

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3-4-5-6 [75-100-125-150]	135 [61]	45 [290]

ENGINEERING SPECIFICATION: ZURN Z-543-84

16 [406] Diameter top drain, Dura-Coated cast iron deep sump body with bottom outlet, seepage pan and combination membrane flashing clamp, extension frame, frame for heavy duty cast iron slotted grate with suspended sediment bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3 thru 6 [75 thru 150]
- 3 thru 6 [75 thru 150]
- 3 thru 6 [75 thru 150]
- 3 thru 6 [75 thru 150]
- 3, 4 [75, 100]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Caulk w/Sealtrol Gskt.
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 8 1/2 [216]
- 8 1/2 [216]
- 7 [178]
- 8 1/2 [216]
- 7 3/4 [197]

PREFIXES

- _____ Z- D.C.C.I. Body and Grate*
- _____ ZB- D.C.C.I. Body with Polished Bronze Grate (Add 3/16 [5] to 3 1/2 [89] Dim.)
- _____ ZN- D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16 [5] to 3 1/2 [89] Dim.)

SUFFIXES

- _____ -DG Duresist Grate
- _____ -G Galvanized Cast Iron
- _____ -TS Top Secured With Slotted Screws
- _____ -V Backwater Valve (See Z-1099)
- _____ -VP Vandal Proof Secured Top
- _____ -90 90° Threaded Side Outlet (See Z-1042)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 2/24/97	C.N. NO. 77051
DWG. NO. P-14434 PRODUCT NO. Z-543-84		