




Z1188-ST-82

LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

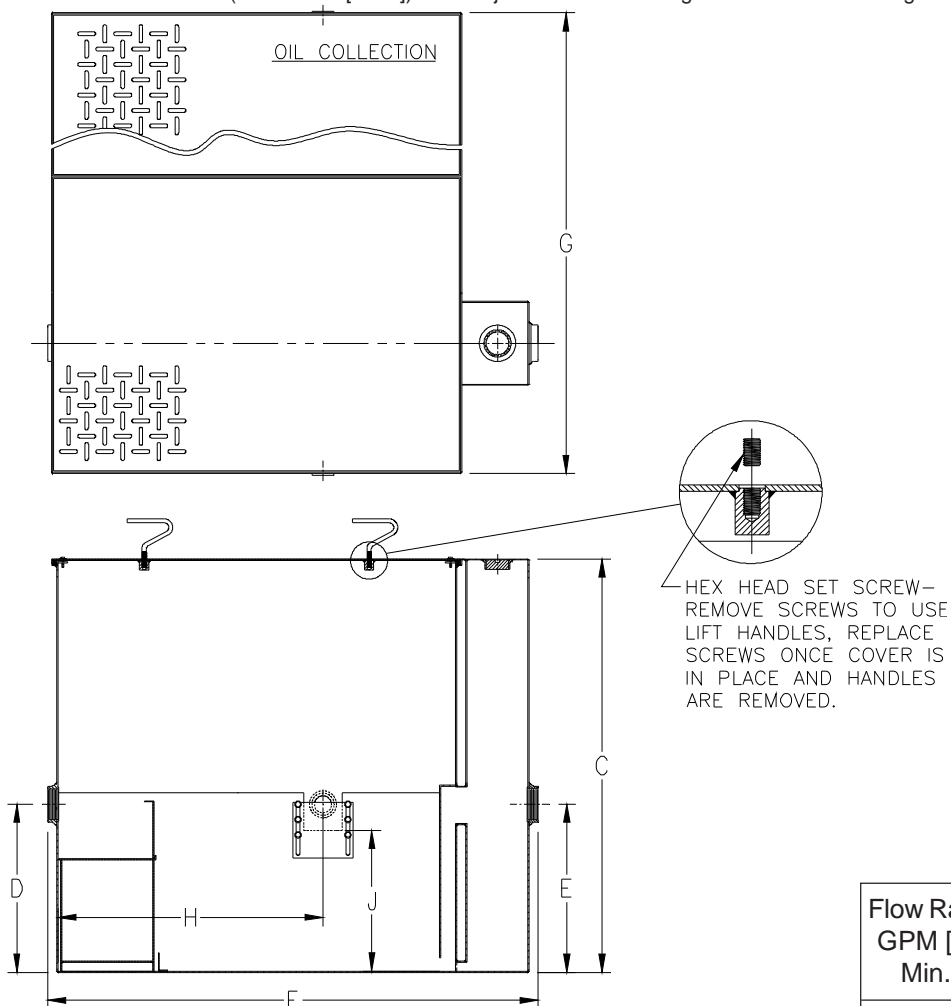

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
350 [1325]	700 [2650]	2	2

Flow Rate GPM [L] Min.	Inlet/ Outlet Size**	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
350 [1325]	6 [152]	1006 [3808]	4000 [1814]	107 1/2 [2731]	43 7/8 [1114]	103 1/8 [2619]	104 3/4 [2661]	61 15/16 [1573]	40 3/8 [1026]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-82 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -HD Heavy-duty traffic cover rated at 10,000 lbs. maximum load. An increased 'C' dim. is required when -HD option is specified. (See -HD option specification sheet)
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ -STR Storage tank on right hand side when facing the inlet.

REV.	DATE: 11/6/09	C.N. NO. 110394
DWG. NO. P-15795		PRODUCT NO. Z1188-ST-82

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED