




Z1173-101

EJECTO-MATIC GREASEPTOR SIZE 1000 GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

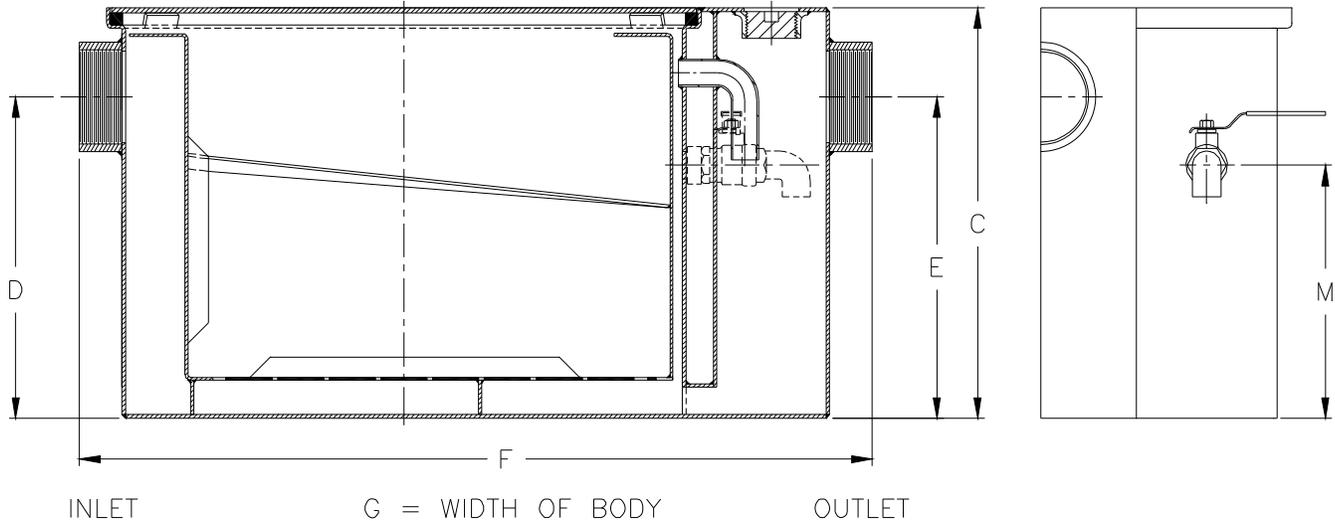

Size	Inlet/ Outlet Size**	Flow Rate GPM. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	M
1000	3 [75]	100 [378]	110 [416]	200 [91]	408 [185]	27 [686]	23 [584]	42-3/4 [1086]	33-5/8 [854]	20-1/4 [514]

ENGINEERING SPECIFICATION: ZURNZ1173-101

Acid Resistant Coated interior and exterior fabricated grease interceptor, rated at 100 GPM [378 L/Min.] and 200 Lbs. [91 kg.] grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray and grease retention tray adjacent to grease draw-off valve. Gasketed non-skid secured cover, complete with Z1108 flow control fitting. Regularly furnished with high inlet and outlet connections.*

PREFIXES

- _____ Z Acid Resistant Coated Fabricated Steel*
- _____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- _____ -AL Aluminum Cover.
- _____ -L Angle type (Z1108-L) flow control device.
- _____ -PW Plug Wrench
- _____ -R Recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- _____ -RE Recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed lift handle.

NOTE: 1. Location of outlet from bottom of interceptor cannot be changed. Draw-off connection regularly furnished on outlet side.

REV. A	DATE: 9/12/12	C.N. NO. 124712
DWG. NO. 302186		PRODUCT NO. Z1173-101