




# Z1172-183

## LARGE CAPACITY GREASE INTERCEPTOR W/ 6 [152] INLET & LOW OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

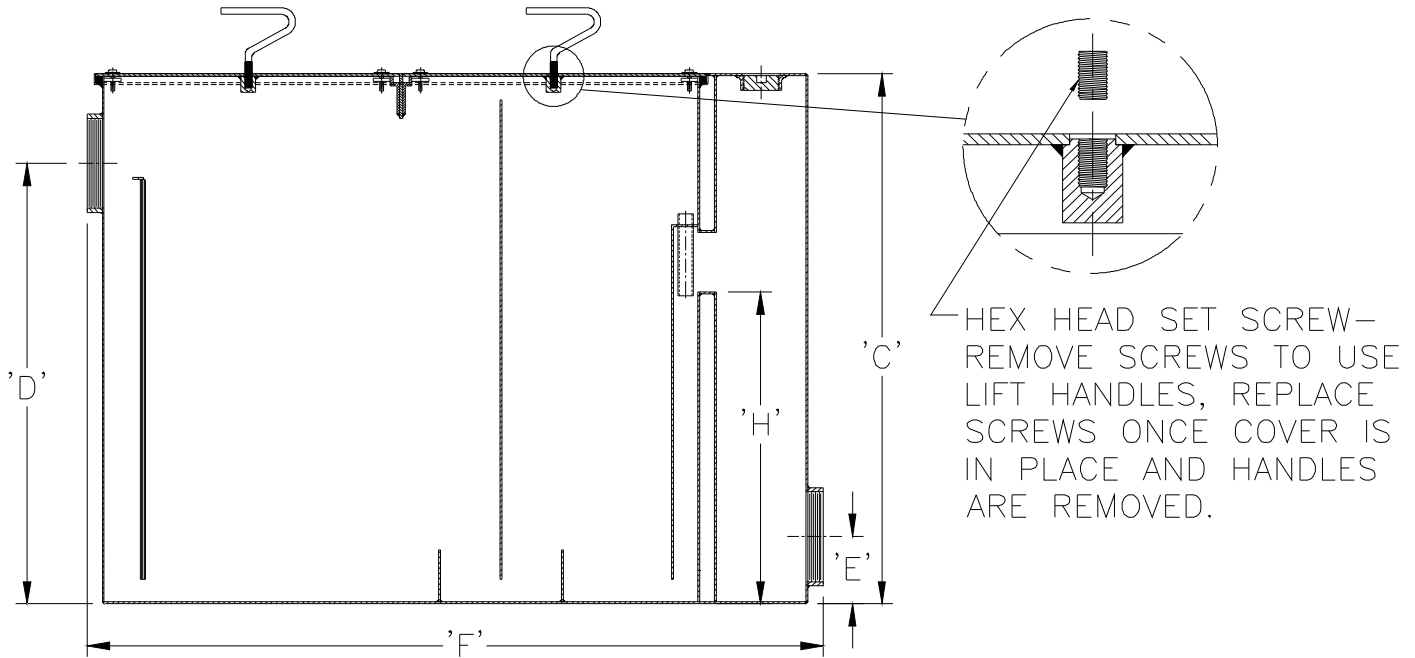

INLET

G=WIDTH OF BODY

OUTLET

Size	Inlet/Outlet Size	Flow Rate G.P.M. [L.P.M.]	Capacity		No. of Covers	Approx. Wt. Lbs [kg]	Dimensions in Inches [mm]					
			Water Gal. [L]	Grease Lbs. [kg]			C	D	E	F	G	H
1400	6 [150]	250[946]	465 [1760]	500 [227]	2	1384 [628]	41 [1041]	36 [914]	4-1/2 [114]	71 [1803]	51-5/8[1311]	33-1/2[851]

**ENGINEERING SPECIFICATION: ZURN Z1172-183**

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 250 GPM and 500 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/ flow diffusing stainless steel baffle. Complete with gasketed non-skid secured cover with removable lift handles, and flow control fitting.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_ -AL Aluminum Cover
- \_\_\_ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- \_\_\_ -HD Heavy-duty traffic cover rated at 10,000 lbs. [4536 kg] maximum safe live load.
- \_\_\_ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide.
- \_\_\_ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.
- \_\_\_ -L Angle type (Z1108-L) flow control device.

\* Regularly furnished unless otherwise specified.