




Z1186-124

OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

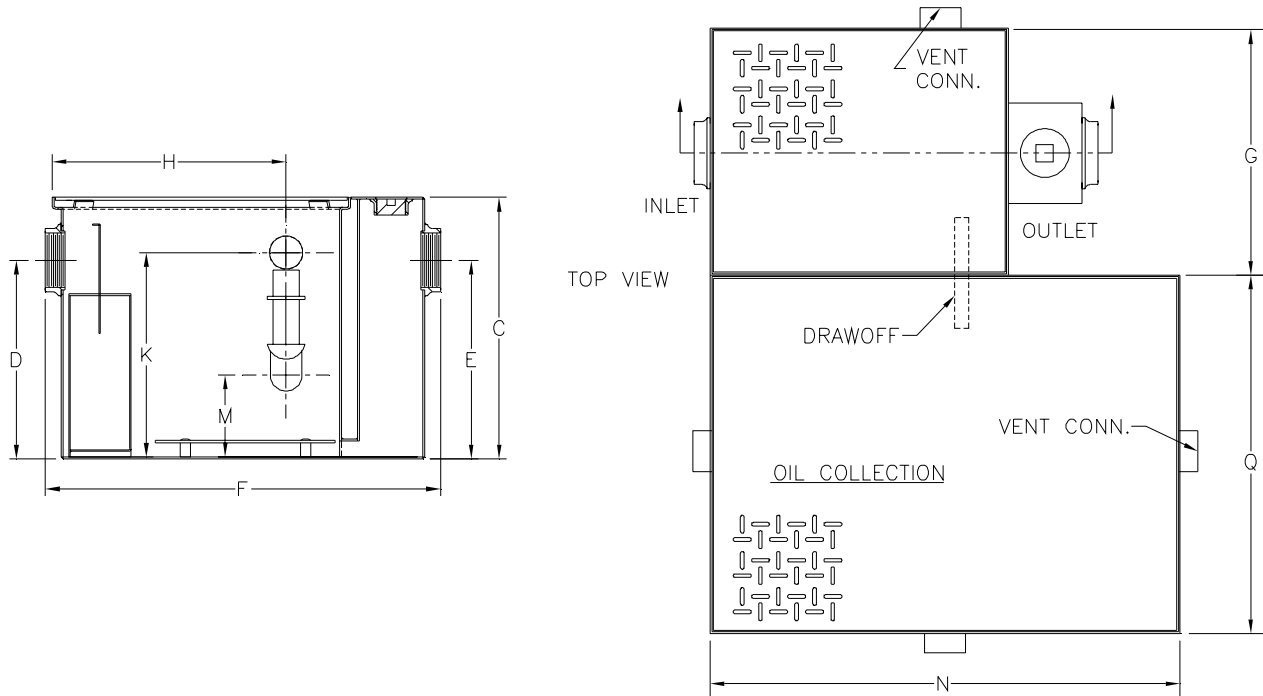

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
500	3 [76]	20 [76]	10 [38]	520 [236]	80 [303]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
500	15 1/2 [394]	9 3/8 [238]	27 1/8 [689]	16 3/4 [425]	13 1/4 [337]	12 1/2 [318]	5 9/16 [141]	59 [1499]	66 [1676]	15 1/2 [394]

ENGINEERING SPECIFICATION: ZURN Z1186-124 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z** Acid Resistant Coated Fabricated Steel*

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #500 will have connections reduced to 3 [76] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

REV.	DATE: 6/2/06	C.N. NO. 95166
DWG. NO. P-15285 PRODUCT NO. Z1186-124		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED