




Z-1172-97

LARGE CAPACITY GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

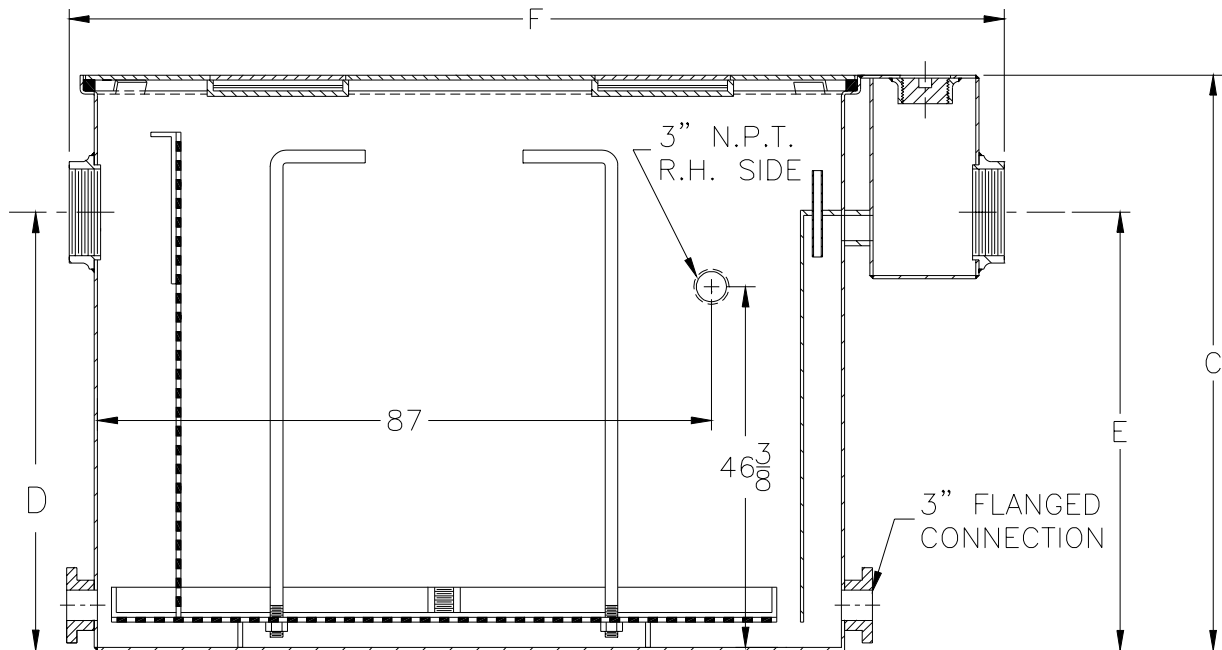

INLET

G= WIDTH OF BODY

OUTLET

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1900	6 [150]	500 [1890]	1440 [5443]	1000 [454]	3	2857 [1297]	57 1/4 [1454]	51 5/8 [1311]	104 [2642]	74 [1880]

ENGINEERING SPECIFICATION: ZURN Z-1172 Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with covered recessed lift handle and enzyme port having bronze plug, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ____ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ____ -HD Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.
- ____ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- ____ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ____ -L Angle type (Z-1108-L) flow control device.

REV. DATE: 11/29/95 C.N. NO. 73543

DWG. NO. P-14267 PRODUCT NO. Z-1172-97

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292