




Z1199-75

AUTO-DRAW-OFF GREASE INTERCEPTOR WITH HEATER ON DRAW-OFF SIDE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

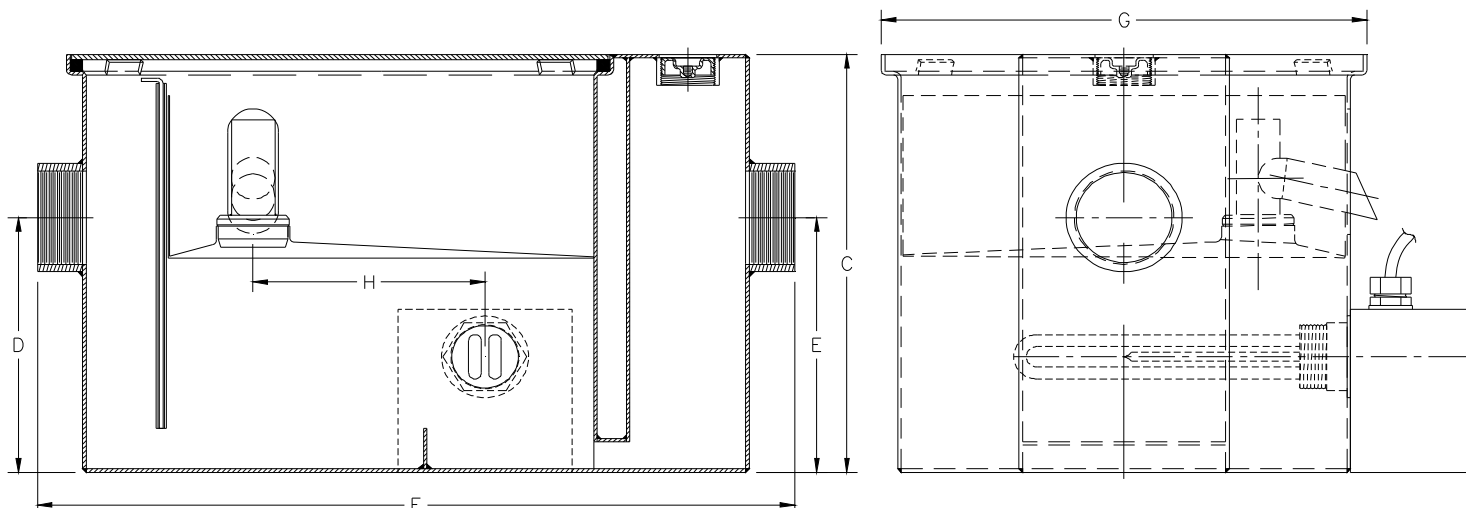

| Size | Inlet/ Outlet Size | Maximum G.P.M. [L] | Capacity | | Approx. Wt. Lbs. [kg] | Dimensions in Inches | | | | |
|------|--------------------------|--------------------------|-------------------|---------------------|-----------------------------|----------------------|-------------|--------------|--------------|----------|
| | | | Water Gal. [L] | Grease Lbs. [kg] | | C | D/E | F | G | H |
| 400 | 3 [76] | 15 [57] | 10 [38] | 30 [14] | 93 [42] | 15-3/8 [391] | 9-3/8 [238] | 26-1/8 [664] | 16-3/4 [425] | 8 [203] |
| 800 | | 50 [189] | 40 [151] | 100 [45] | 190 [86] | 23-1/2 [597] | 16 [406] | 35 [889] | 24-1/2 [622] | 12 [305] |

ENGINEERING SPECIFICATION: ZURN Z1199-75

All type 304 stainless steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with automatic grease draw-off, 120V AC heater on draw-off side, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom sediment baffle, and visible double wall trap seal. Gasketed non-skid secured cover and Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection. Note: Location of inlet and outlet from bottom of interceptor cannot be changed.

PREFIXES

____ Z All Type 304 Fabricated Stainless Steel*

SUFFIXES

____ -AL Aluminum Cover
 ____ -L Angle type (Z1108-L) flow control device with plunger.

Note: For above floor use only, cannot be recessed.

* Regularly furnished unless otherwise specified.