




Z455B-FC

TRAP DRAIN W/ "TYPE B" STRAINER, FLOOR CLEANOUT & FLUSH PLUG COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

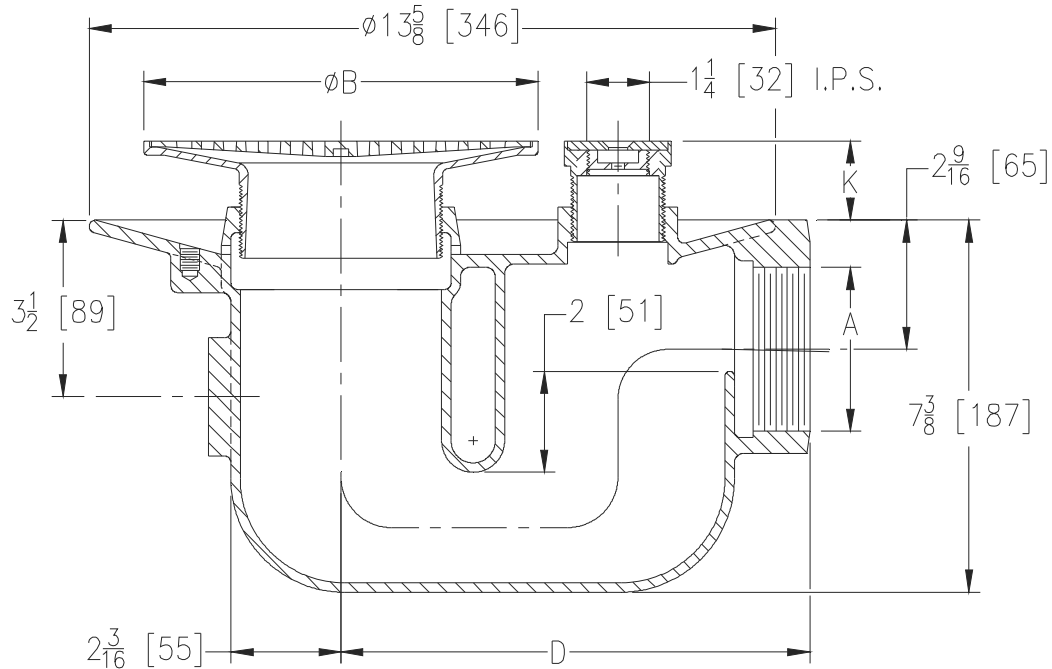

Dimensions In Inches [mm]				Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A Pipe Size	B Strainer Dia.	K			
		Min.	Max.		
2, 3, 4 [51, 76, 102]	5 [127]	7/8 [22]	2 [51]	37 [17]	8 [52]
2, 3, 4 [51, 76, 102]	6 [152]	1-1/8 [29]	2-1/4 [57]	39 [18]	9 [58]
2, 3, 4 [51, 76, 102]	7 [178]	1-1/2 [38]	2-5/8 [67]	41 [19]	12 [77]
2, 3, 4 [51, 76, 102]	8 [203]	1-1/2 [38]	2-5/8 [67]	43 [20]	18 [116]

ENGINEERING SPECIFICATION: ZURNZN455B-FC

Floor and shower drain. Dura-Coated cast iron body with integral trap, flush plug cover, side outlet, seepage pan, floor level cleanout and adjustable "TYPE B" polished, nickel bronze strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2, 3 [51, 76]
- 4 [102]
- 2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

- ___ IP Threaded
- ___ IP Threaded
- ___ NH No-Hub (I.P. W/Z1040)

'D' Dim.

- 9-1/16 [230]
- 9-5/16 [237]
- 11-3/4 [298]

PREFIXES

- ___ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

- ___ -C Clamping Collar
- ___ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- ___ -PC Protective Cover
- ___ -V Backwater Valve (Ball Float Type)
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.