


Z1172-153 LARGE CAPACITY GREASE INTERCEPTOR WITH 6 [152] INLET/OUTLET AND INTEGRAL EXTENSION

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

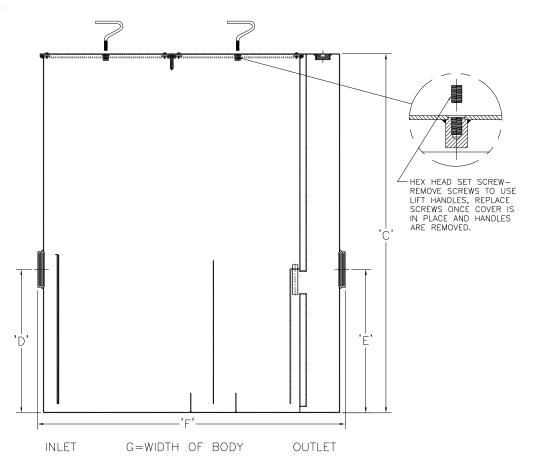

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Capacity		s v	Approx.	Dimensions in Inches			
			Water	Grease	. of ver	Wt. Lbs. [kg]				
			Gal. [L]	Lbs. [kg]	ဦး		С	D/E	F	G
1200	6 [152]	150 [567]	195 [737]	300 [136]	2	1220 [553]	65 3/4 [1670]	26 1/4 [667]	56 [1422]	41 5/8 [1057]

ENGINEERING SPECIFICATION: ZURN Z1172-153 Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at _____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, integral extension, and removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Regularly furnished with 6 [152] inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____- -AL Aluminum Cover
- _____ -HD Heavy duty traffic cover rated at 10,000 lbs. 4536 [kg] maximum load.
- _____ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- _____ -L Angle type (Z1108-L) flow control device.

	REV.	DATE:	11/5/09	C.N. NO. 99976						
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-15711	PRODU	CTNO. Z1172-153						
ZURN INDUSTRIES, LLC										