





Z1170-155

SIZE 800 GREASE INTERCEPTOR W/ EXTENSION, AND SECURING FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

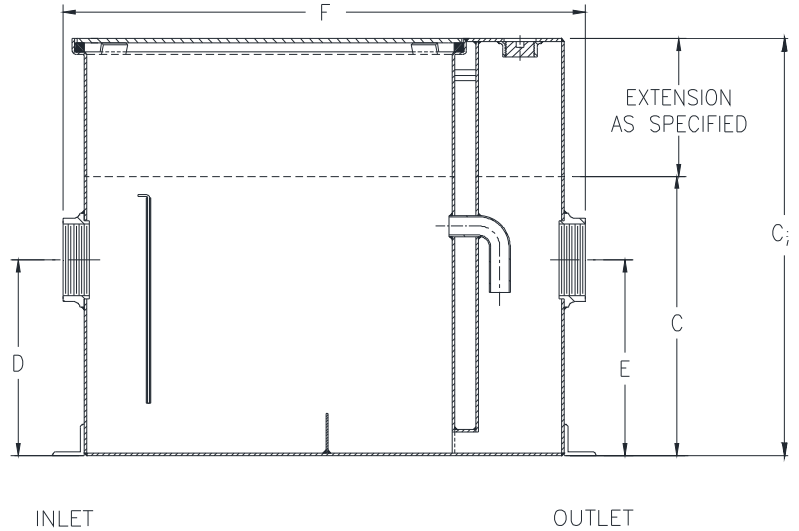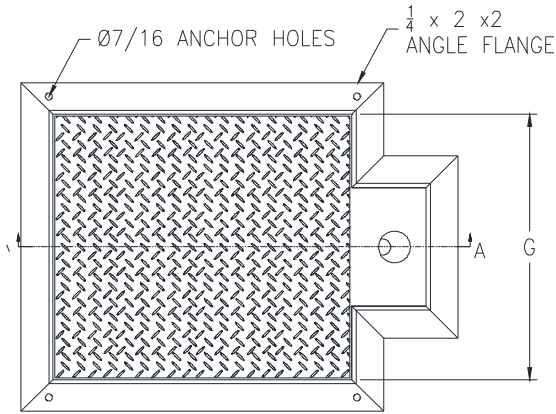

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [LPM]	Capacity		Approx. Wt. Lbs. [kg]**	Dimension in Inches [mm]			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
800	3 [76]	50 [189]	40 [151]	100 [45]	180 [82]	21-1/2 [546]	16[406]	36[914]	24-1/2 [622]

ENGINEERING SPECIFICATION: ZURNZ1170-155

Acid Resistant Coated interior and exterior fabricated steel grease interceptor with securing flange, PDI, rated at 50 GPM and 100 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover complete with Z1108 flow control fitting. Acid resistant coated interior and exterior fabricated steel extension section (Specify 'C#' Dim. required). Regularly furnished with a high inlet and outlet connection. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

- _____ Z Acid Resistant Coated Fabricated Steel*
- _____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- _____ -L Angle type (Z1108-L) flow control device.
- _____ -T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify 'C' Dim. and required recess depth - 1/8 [3], 3/4 [19], or 1-1/4 [32]).

* Regularly furnished unless otherwise specified.

**Weight does not include extension