




Z-1186-89
SIZE 300 OIL INTERCEPTOR
W/ INTEGRAL STORAGE TANK

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

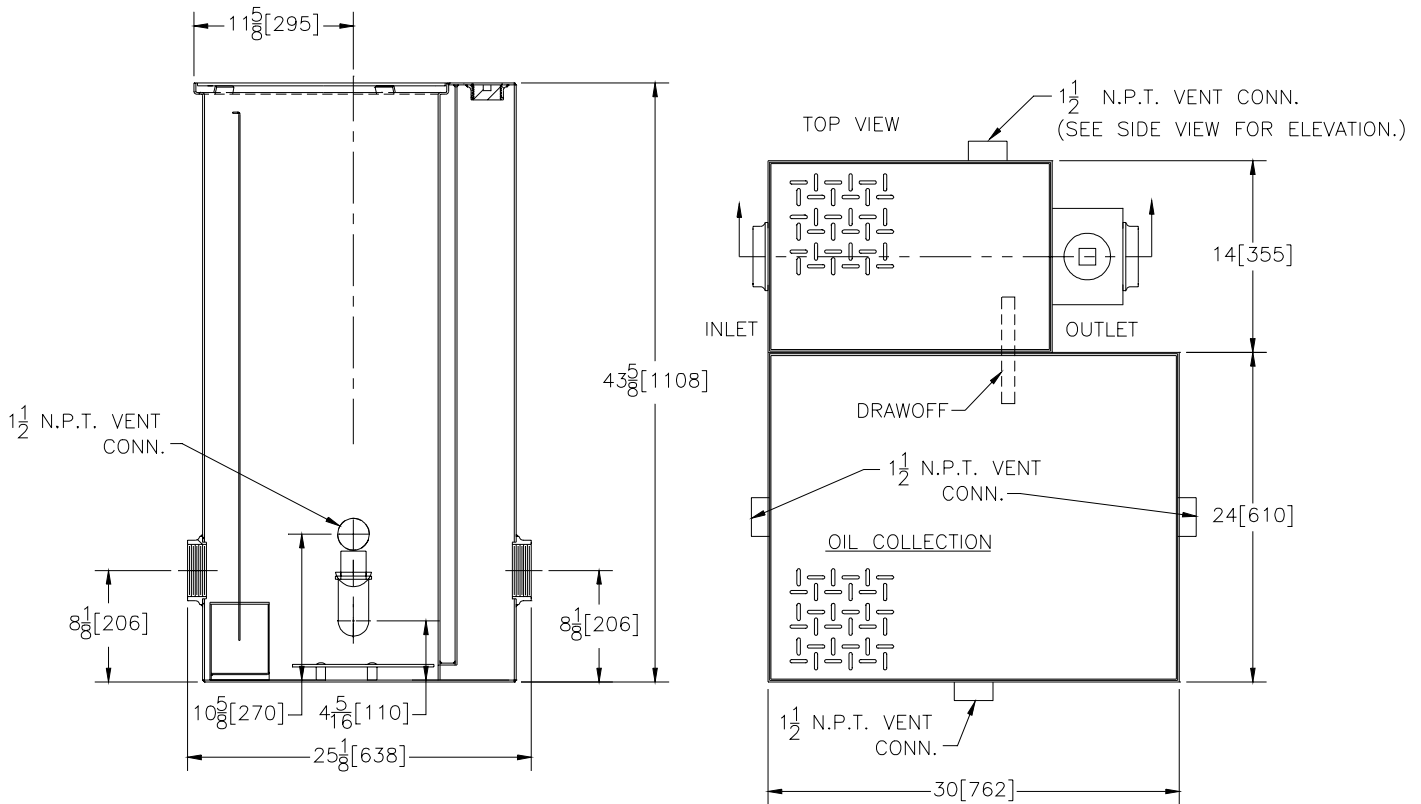

DEPTH OF STORAGE TANK = 85 [2159]
 OIL STORAGE CAPACITY = 100 GAL. [371]
 3- 1 1/2 N.P.T. VENT CONN. 33 [838] FROM TOP OF OIL STORAGE COMPARTMENT.

Size	Inlet/outlet Size**	Flow Rate G.P.M.	Water Capacity Gal. [l]	Approx. Wt. Lbs. [kg]
300	3 [76]	10 [38]	7 [26]	470 [210]

ENGINEERING SPECIFICATION: ZURN Z-1186-89 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z-** Acid Resistant Coated Fabricated Steel*

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #300 will have 3 [76] connections reduced to 2 [51] as standard.

REV. A	DATE: 10/16/97	C.N. NO. 78797
DWG NO. P-14533	PRODUCT NO. Z-1186-89	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED