




Z1188-ST-80

SPECIFICATION SHEET

LARGE CAPACITY OIL INTERCEPTOR W/INTEGRAL STORAGE TANK, DOUBLE WALL CONTAINMENT TANK, HIGH LEVEL SENSOR & HEAVY-DUTY TRAFFIC COVER

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

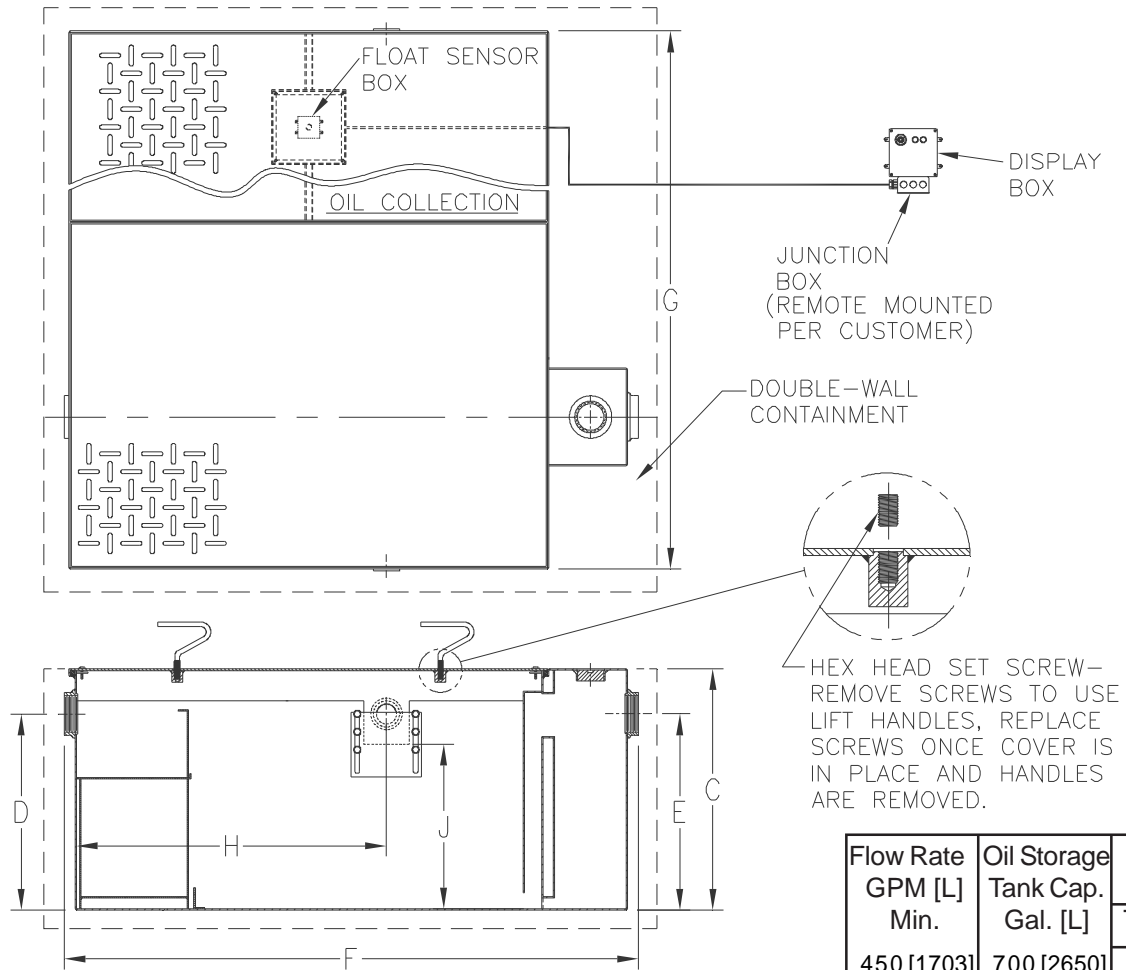

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
450 [1703]	700 [2650]	2	2

Flow Rate GPM [L] Min.	Inlet/ Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
450 [1703]	6 [152]	1575 [5962]	9500 [4309]	58 1/4 [1480]	48 5/8 [1235]	123 1/8 [3127]	102 7/8 [2613]	75 1/4 [1911]	44 5/8 [1133]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-80

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off, vent connections and secured gasketed non-skid heavy-duty traffic cover rated at 10,000 lb. [4535 kg.] maximum safe live load. Complete with flow control fitting, left hand integral storage tank, electronic oil level float sensor with display box and double containment wall. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ -STR Storage tank on right hand side when facing the inlet.

Note:

1. Double wall construction will extend the overall length and width of the unit by 3 [76] per side and increase the overall depth by 3 [76].

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 01/09/09	C.N. NO. 99559
DWG. NO. P-15643	PRODUCT NO. Z1188-ST-80	

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292