




Z415N-78

BODY ASSEMBLY W/ "TYPE N" STRAINER, SECURED S.S. COVER & BUCKET WITH MESH LINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

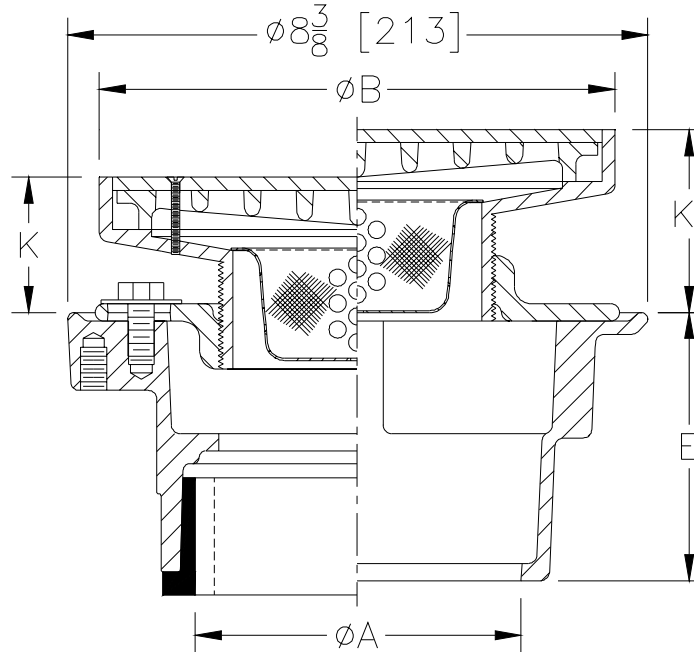

Dimensions In Inches						Approx. Wt. Lbs. [Kg.]	Strainer Open Area Sq. In. [Cm ²]
A - Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3-4 [51-76-102]	7 [178]	1 1/8 [29]	2 3/8 [60]	1 3/4 [44]	2 7/8 [73]	17 [8]	12 [77]
2-3-4 [51-76-102]	9 [229]	1 5/8 [41]	2 5/8 [67]	2 1/4 [57]	3 1/2 [89]	21 [10]	23 [148]
6 [152]	9 [229]	1 5/8 [41]	2 5/8 [67]	2 1/4 [57]	3 1/2 [89]	23 [10]	23 [148]

ENGINEERING SPECIFICATION: ZURN Z415N-78 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE N" D.C.C.I. strainer with secured deep flanged grate with stainless steel solid cover, and sediment bucket with 40 x 40 mesh liner.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2 thru 4 [51 thru 102]	_____	IC Inside Caulk	3 7/8 [98]
2 [51]	_____	IP Threaded	2 3/8 [60]
3 [76]	_____	IP Threaded	2 5/8 [67]
4 [102]	_____	IP Threaded	2 7/8 [73]
6 [152]	_____	IP Threaded	2 3/4 [70]
2 thru 4 [51 thru 102]	_____	NH No-Hub	3 7/8 [98]
2 thru 4 [51 thru 102]	_____	NL Neo-Loc	4 5/8 [117]

PREFIXES

- _____ Z D.C.C.I. Body Assembly w/ Dura-Coated Top*
- _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top

SUFFIXES

- | | |
|--|--|
| _____ -AR Acid Resisting Epoxy Coated Cast Iron | _____ -Y Sediment Bucket |
| _____ -G Galvanized Cast Iron | _____ -90 90° Threaded Side Outlet Body
(2 [51], 3 [76] Only) |
| _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) | |
| _____ -U 1 - 3 [25 - 76] High Extension Adapter | |
| _____ -V Backwater Valve | |
| _____ -VP Vandal-Proof Secured Top | |

REV. A DATE: 5/20/04 C.N. NO. 92242

DWG. NO. P-14839 PRODUCT NO. Z415N-78

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED