




Z1185-147
LINT INTERCEPTOR SIZE 3 WITH
3" [76] INLET/OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

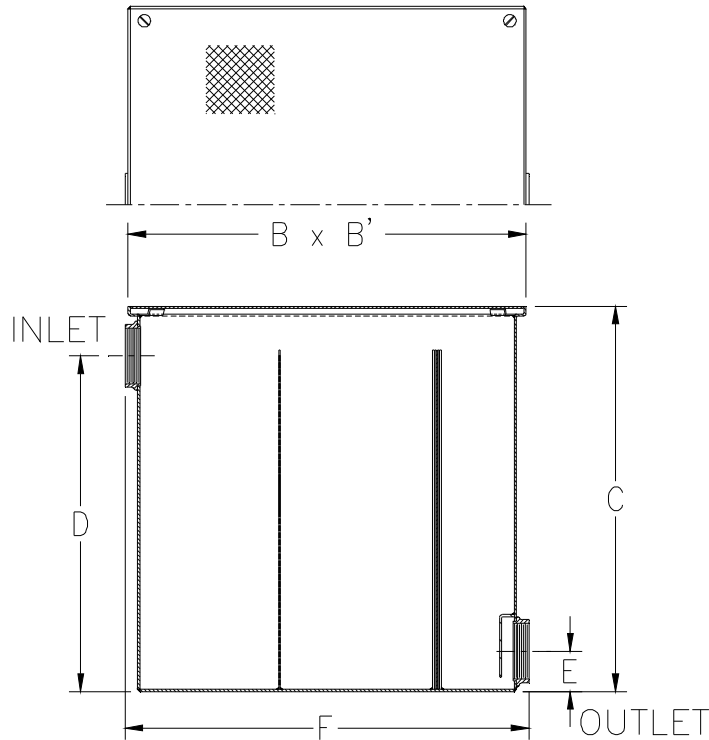

Size No. of Machines	Inlet/Outlet Size In. [mm]	Flow Rate G.P.M. [LPM]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				B	B'	C	D	E	F
3	3 [76]	30 [113]	93 [42]	17 [432]	17 [342]	16-1/2 [419]	13 [330]	3-1/4 [82]	17-1/4 [438]

ENGINEERING SPECIFICATION: ZURN Z1185-147

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover with removable lift handle, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8" [10mm] diameter perforated holes. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).
- ___ -RS Aluminum Screen Replacement Assembly

* Regularly furnished unless otherwise specified.