




Z-100-115 15" DIAMETER MAIN  
ROOF DRAIN WITH WATER LEVEL REGULATOR

T A G \_\_\_\_\_

Dimensions Subject to Manufacturing Tolerances

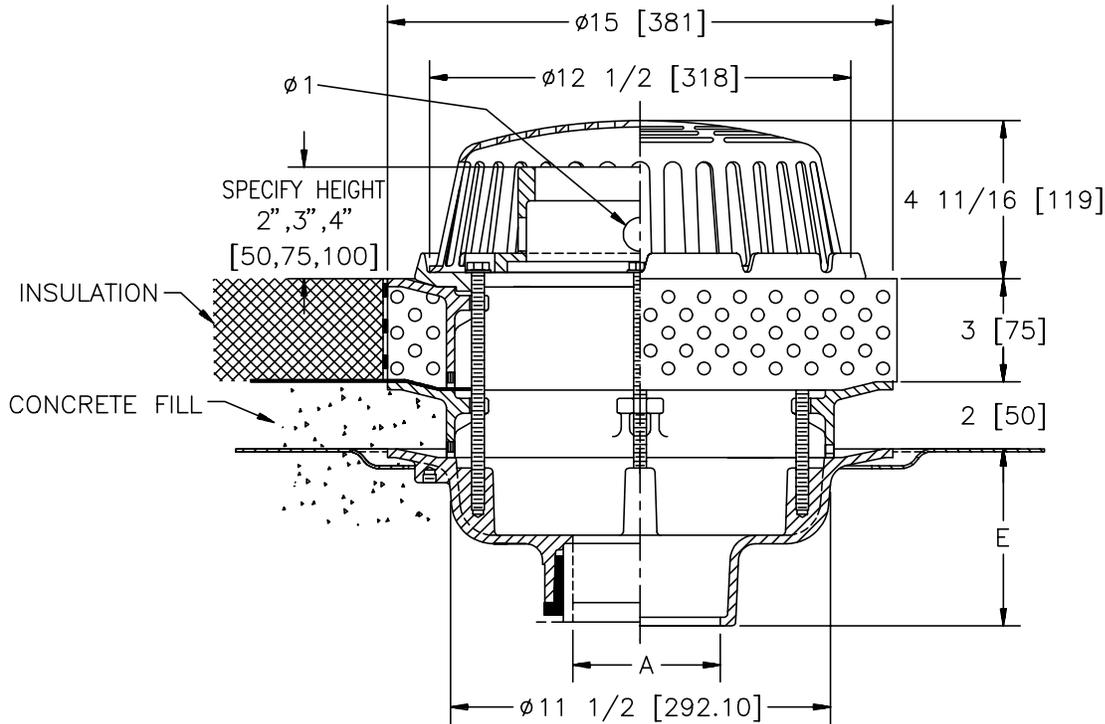

A- Pipe Size In.	Approx. Wt. Lbs.	Dome Open Area Sq. In.
2-3-4	31	103
5-6	32	
8	33	
10	35	

**ENGINEERING SPECIFICATION:** ZURN Z-100-115 15" Diameter roof drain. Dura-Coated cast iron body, clamping collar with integral gravel guard, water level regulator, two extensions and low silhouette Poly-Dome strainer and roof sump receiver.

**OPTIONS** (Check/specify appropriate options)

**OUTLET** (Specify type)

- \_\_\_\_\_ **IC** Inside Caulk
- \_\_\_\_\_ **IG** Inside Caulk w/Sealtrol Gskt.
- \_\_\_\_\_ **IP** Threaded
- \_\_\_\_\_ **NH** No-Hub
- \_\_\_\_\_ **NL** Neo-Loc

**PIPE SIZE** (Specify size)

- \_\_\_\_\_ 2" thru 6", 8", 10"
- \_\_\_\_\_ 2" thru 4", 6"
- \_\_\_\_\_ 2" thru 6", 8", 10"
- \_\_\_\_\_ 2" thru 6", 8", 10"
- \_\_\_\_\_ 2" thru 4"

**'E' BODY HT. DIMENSION**

- 5-1/4"
- 5-1/4"
- 3-3/4"
- 5-1/4"
- 4-5/8"

**PREFIXES**

- \_\_\_\_\_ **Z-** D.C.C.I. Body with Poly-Dome\*
- \_\_\_\_\_ **ZA-** D.C.C.I. Body with Aluminum Dome
- \_\_\_\_\_ **ZC-** D.C.C.I. Body with Cast Iron Dome
- \_\_\_\_\_ **ZRB-** D.C.C.I. Body with Plain Bronze Dome

**SUFFIXES**

- \_\_\_\_\_ **-AC** Angular Underdeck Clamp
- \_\_\_\_\_ **-BS** Bronze Mesh Screen Over Dome
- \_\_\_\_\_ **-C** Underdeck Clamp
- \_\_\_\_\_ **-DX** Dex-o-tex Flange
- \_\_\_\_\_ **-EA** Adjustable Extension Assembly 1-3/4" thru 3-1/2"
- \_\_\_\_\_ **-G** Galvanized Cast Iron
- \_\_\_\_\_ **-GD** Galvanized Cast Iron Dome
- \_\_\_\_\_ **-S** Secondary Clamp Collar
- \_\_\_\_\_ **-SS** Stainless Mesh Screen Over Dome

- \_\_\_\_\_ **-VP** Vandal Proof Secured Top
- \_\_\_\_\_ **-XJ** Vertical Expansion Joint (See Z-190)
- \_\_\_\_\_ **-84** Stainless Steel Perforated Gravel Guard
- \_\_\_\_\_ **-90** 90° Threaded Side Outlet Body (Previously Z-115)

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. \_\_\_\_\_ DATE: 12/7/93 C.N. NO. 69426

DWG. NO. P-13898 PRODUCT NO. Z-100-115