


Z-1188-97 LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE AND SAND INTERCEPTOR

Dimensions Subject to Manufacturing Tolerances

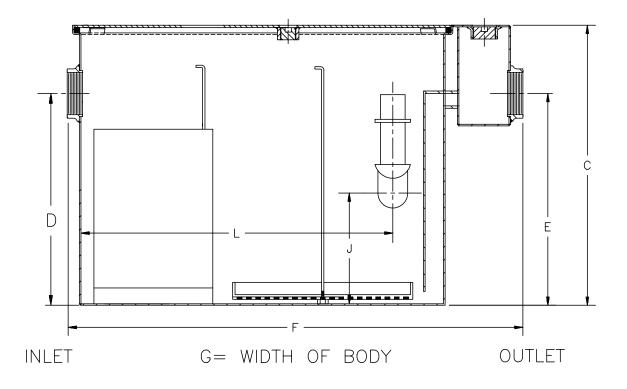

Flow Rate G.P.M.	Inlet/Outlet Size**	Total Capacity	Oil Storage Capacity	Approx. Wt. Lbs.	Number of Covers	Dimensions In Inches						
		Gal.	Gal.			С	D	E	F	G	J	L
75	5	460	100	1438	2	41	36	36	71	51 3/8	20	56 5/8
500	6	1435	500	2970	3	57 1/4	51 5/8	51 5/8	104	74	23 1/4	88 3/8

ENGINEERING SPECIFICATION: ZURN Z-1188-97 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal storage, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections on the outlet end. Secured gasketed non-skid 3/8" diamond treadplate cover complete with internal flow control.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z-

Acid Resistant Coated 3/16" Fabricated Steel*

	REV. A	DATE:	07/05/95	C.N. NO. 724	410				
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG NO.	P-14181	PRODU	ICT NO. Z-118	38-97				
ZURN INDUSTRIES, INC. SPECIFICATION DRAINAGE OPERATION 1801 Pittsburgh Ave. Frie, PA 16514 Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com									

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292