




Z-1185-90

LINT INTERCEPTOR W/ INTEGRAL EXTENSION, ANCHOR FLANGE, AND CLAMP COLLAR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

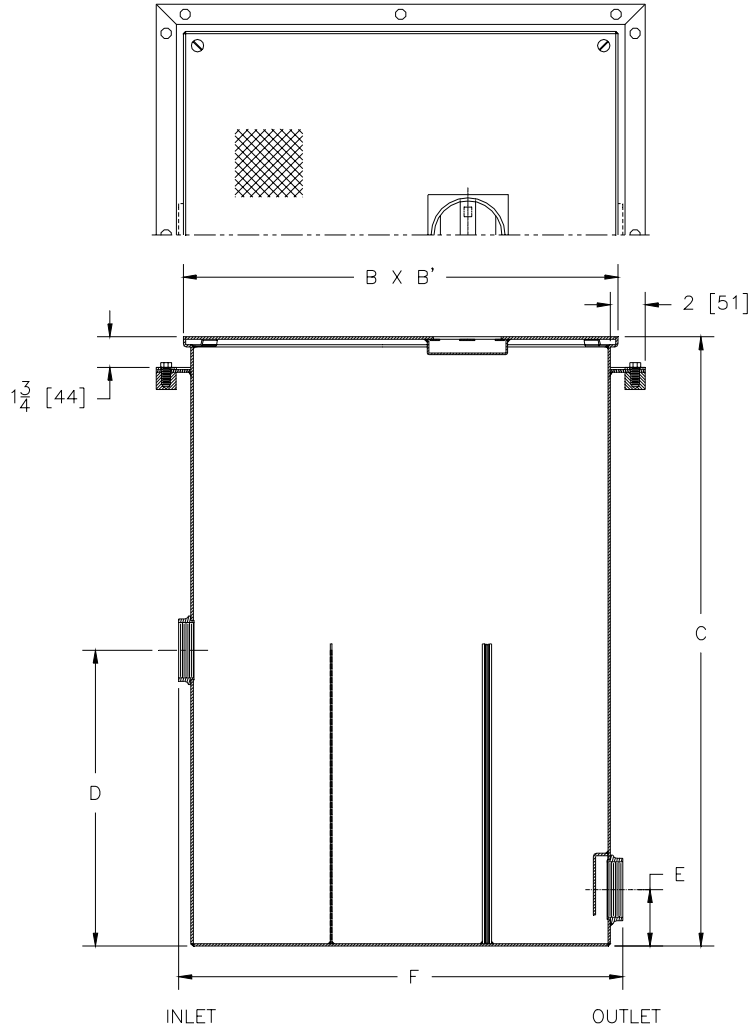

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
7	3 [75]	70 [265]	215 [98]	25 [635]	25 [635]	35 [889]	17 [432]	3 1/4 [82]	25 1/2 [648]

ENGINEERING SPECIFICATION: ZURN Z-1185-90 Acid Resistant Coated interior and exterior fabricated steel lint interceptor with integral extension, anchor flange with clamp collar, non-skid secured cover, stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ RS- Stainless Steel Screen Replacement Assembly

REV.	DATE: 10/16/02	C.N. NO. 89986
DWG. NO. P-14934 PRODUCT NO. Z-1185-90		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED