




Z1186-118

OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

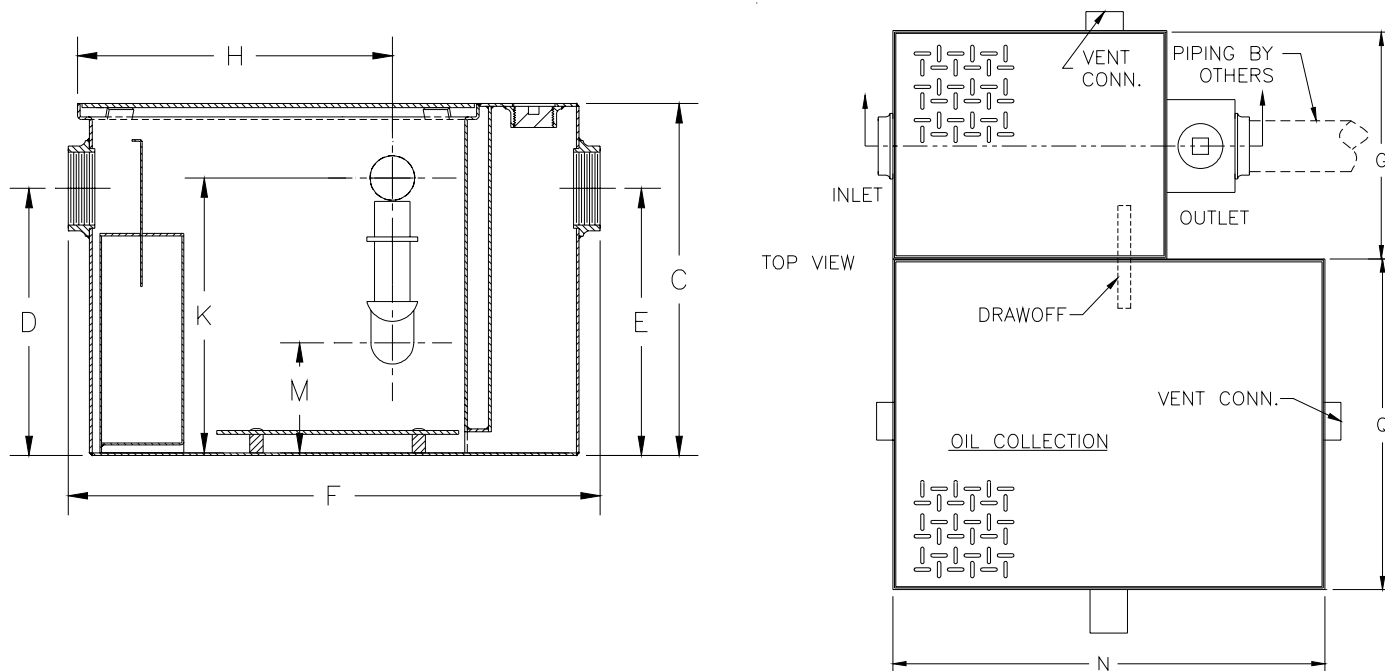

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
800	3 [76]	50 [189]	30 [113]	453 [205]	170 [643]

R= DEPTH OF STORAGE TANK

Dimensions In Inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
800	24 1/4 [616]	14 1/4 [362]	34 1/8 [867]	22 1/2 [571]	17 1/4 [438]	21 1/4 [540]	8 3/16 [208]	41 [1041]	24 [609]	58 [1473]

ENGINEERING SPECIFICATION: ZURN Z1186-118 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting, and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

— **Z** Acid Resistant Coated Fabricated Steel*

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #800 will have 4 [100] connections reduced to 3 [75] as standard. If changed, flow control and oil draw-off must be adjusted accordingly.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 7/17/03	C.N. NO. 91116
DWG NO. P-14996	PRODUCT NO. Z1186-118	

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292