


Z1204-ND-PF ADJUSTABLE VERTICAL SIPHON JET NO-HUB W/ PREFAB FEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

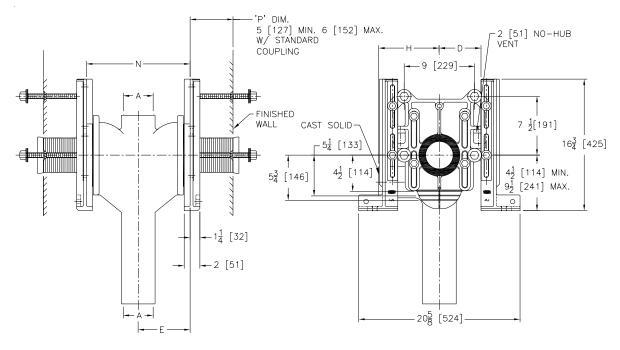

Product	Dimensions In Inches [mm]					Approx.
No.	A	D	E	Н	Ν	Wt. Lbs. [kg]
Z1204-ND4-PF	4[102]	5[127]	6-5/8[168]	5-1/2[140]	13-1/4[336]	139 [63]
Z1204-ND5-PF	5[127]	5-1/2[140]	6-5/8[168]	6-1/2[165]	13-1/4[336]	140 [63]
Z1204-ND6-PF	6[152]	6[152]	7-1/8[181]	6-1/2[165]	14-1/4[362]	145 [66]

Note:

- 1. Min. 'P' Dim. Obtainable=2[51]
- 2. Two 4[102] or 5[127] side inlets as indicated.
- Feet bolted to floor using min. 1/2[13] dia. bolts and back slots on carrier feet.

ENGINEERING SPECIFICATION: ZURN Z1204-ND()-PF Adjustable, vertical siphon jet water closet "Rigid System" with () size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron right and left hand fitting, with 2[51] vent, adjustable gasketed face plate, prefab foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down, and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

_____Z1204-ND()-PF No-Hub Stack, Single Inlet, 2 [51] Right Hand Vent

PREFIXES

- Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
- ZC D.C.C.I. System with Compression Fit Faceplate
- ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

SOLLIVES					
A	Auxiliary Support Assembly	VL	Left Hand Vent Connection		
	(For P-Dim. Greater than 18 [457])		Vandal-Proof Trim		
B	Blowout Type Fixture Support	X3	3 [76] Foot Extension		
BC	Back Cleanout	X4	4 [102] Foot Extension		
CC	Corrosion Resistant Cast Iron Coupling	29	Mechanical Test Cap Assembly		
	(6 to 12 [152] to [305])		(Previously Z1210-29)		
CL	Coupling Length Greater than 12 [152]	45	Finishing Frame for Siphon Jet System		
	(Specify Length Required.)	50	Flush Valve Supply Support for W.C.		
F	Floor Mount, Back Outlet Fixture Support	61	"ZZ" Coupling Wrench		
F G	Galvanized Cast Iron				
JJ	Two 2" [51] Auxiliary Inlets				
JL	2 [51] Left-Hand Auxiliary Inlet				
JR	2 [51] Right-Hand Auxiliary Inlet				
-M	Auxiliary Foot Support				
	(For P-Dim. 10-18 [254-457])	REV. D	ATE: 4/22/09 C.N. NO. 99925		
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED		DWG. NO. 841	I81 PRODUCT NO. Z1204-ND-PF		
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED		DWG. NO. 841	I81 PRODUCT NO. Z1204-ND-PF		

ZURN INDUSTRIES, LLC.

SPECIFICATION DRAINAGE OPERATION

1801 Pittsburgh Ave.

Frie, PA 16514

Phone: 814/455-0921 Fax: 814/454-7929
In Canada: ZURN INDUSTRIES LIMITED

6540 Gottardo Court

Mississauga, Ontario L5T 2A2

Phone: 905/795-8844 Fax: 905/795-8850