


Z1188-131 LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK, EXTENSION AND HEAVY-DUTY TRAFFIC COVER

SPECIFICATION SHEET

TAG

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

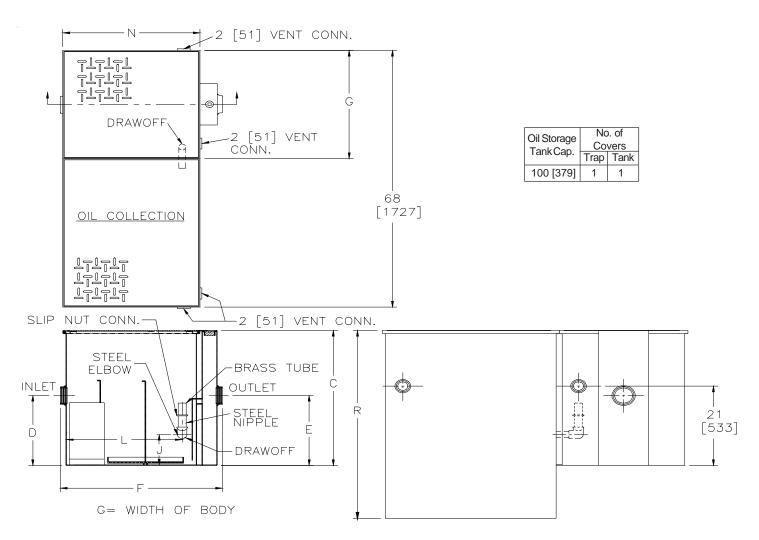

Flow Rate GPM [L] Min	Inlet/ Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	Dimensions In Inches							
				С	D/E	F	G	J	L	N	R
75 [284]	4 [102]	65 [246]	580 [263]	35 3/4 [909]	18 1/2 [470]	36[914]	28 5/8 [727]	8 [203]	25 3/4 [654]	30 1/2 [775]	49 3/4 [1264]

ENGINEERING SPECIFICATION: ZURN Z1188-131 Large capacity Acid Resistant Coated interior and exterior fabricated heavy-duty steel oil interceptor, with bronze cleanout plug, visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off, vent connections and integral storage tank. Complete with heavy-duty secured gasketed non-skid traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load and flow control fitting.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z

Acid Resistant Coated Fabricated Steel*

SUFFIXES

-K Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide. No extension required to accomodate -K.

	REV.	DATE: 03	8/08/05	C.N. N	O. 93084				
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-15131	PRODUC	TNO. Z	Z1188-131				

ZURN INDUSTRIES, INC. SPECIFICATION DRAINAGE OPERATION 1801 Pittsburgh Ave. Erie, PA 16514

Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com