


Z1020-VP ELECTRONIC TRAP PRIMER W/VANDAL-PROOF COVER

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

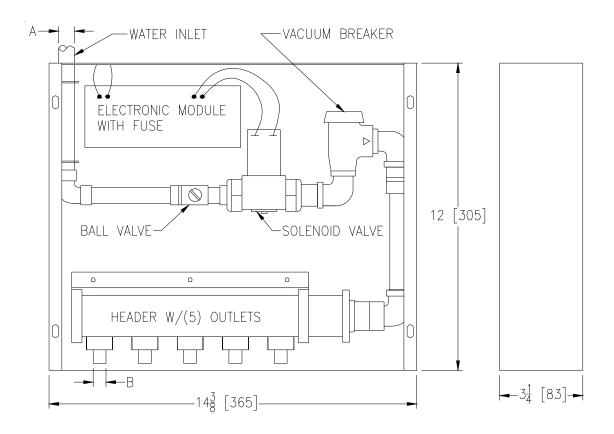

Dimensior	Approx. Wt. Lbs.		
A	В	[kg]	
1/2 [13]	1/2 [13]	12 [5]	

ENGINEERING SPECIFICATION: ZURN Z1020-VP

Electronic trap primer programmed as standard to provide a six second water injection to traps every twenty-four hours*, complete with galvanized steel combination surface or recessed mount box, vandal-proof secured cover, vandal-proof driver for cover scew removal, 1/2 [13] solder copper inlet connection, brass ball type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120-24 VAC transformer, brass atmospheric vacuum breaker, PEX waterway, and anti-scaling multi-port manifold with five 1/2 [13] Male PEX outlet connections. (For copper connection outlets -CW option must be specified.)

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____ -CW Copper Waterway (with 1/2 [13] Female I.P.S. Connection)
- -DU4 Additional Distribution Units with Copper Waterway (Specify Quantity) (Contact Zurn for Sizing Specifications)
- ____ -10 Ten Outlets

	REV.	DATE: 1	1/6/09	C.N. NO. 110393				
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	84386	PRODUCT	NO.Z1020-VP				
ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514 Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com								