
TAG	

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

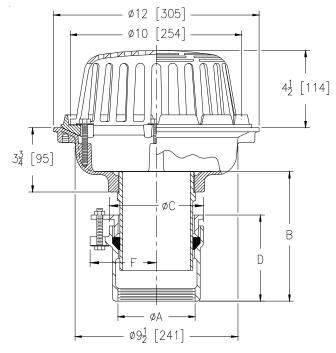

Dimensions in inches [mm]							Dome Open
Α	В		С	D	F	Wt.	Area
Pipe Size	Min	Max	O	Б	•	lbs [kg]	in² [cm²]
2 [51]			3-5/8 [92]	5 [127]	2-3/4 [70]	30 [14]	
3 [76]	6-1/2 [165]	8-1/2 [216]	4-5/8 [117]	5 [127]	3-1/4 [82]	33 [15]	78 [503]
4 [102]			5-1/2 [140]	4-3/4 [121]	3-3/4 [95]	35 [16]	76 [303]
6 [152]	6-7/8 [175]	8-5/8 [219]	7-7/8 [200]	5 [127]	5 [127]	45 [20]	

ENGINEERING SPECIFICATION: ZURNZ121-XJ

12" [305mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, vertical expansion joint and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify	size/ty	/pe) OUTLET	•	
2,3,4,6 [51,76,102,152]		ΙP	Threaded		
2,3,4,6 [51,76,102]		NH	No-Hub (IP w	/Z1040)
PREFIXES					
Z D.C.C.I. Body with Poly-Dominical ZA D.C.C.I. Body with Alumin D.C.C.I. Body with Cast Iron	um Dome				
SUFFIXES					
AR Acid Resistant Epoxy Coa	ted			-G	Galvanized Cast Iron
C Underdeck Clamp -DP Top-Set® Roof Deck Plate				-R	Roof Sump Receiver
				-SC	Secondary Clamping Collar
(Replaces both -C and -R)				-SS	Stainless Mesh Screen Over Dome
E Static Extension 1 [25] thru 4				-VP	Vandal Proof Secured Top
EB Top-Set Adjustable Extens	on Asseml	oly		-84	Stainless Steel Perforated Gravel Guard
FG Flush Grate				-85	Stainless Steel Perforated Extension
* Pagularly furnished unless otherwise specified				-89	2 [51] High External Water Dam

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Date: 10/4/2017 C.N. No. 138361

Prod. | Dwg. No. Z121-XJ