




# Z1187-SI-E

## SAND INTERCEPTOR W/ INTEGRAL EXTENSION

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

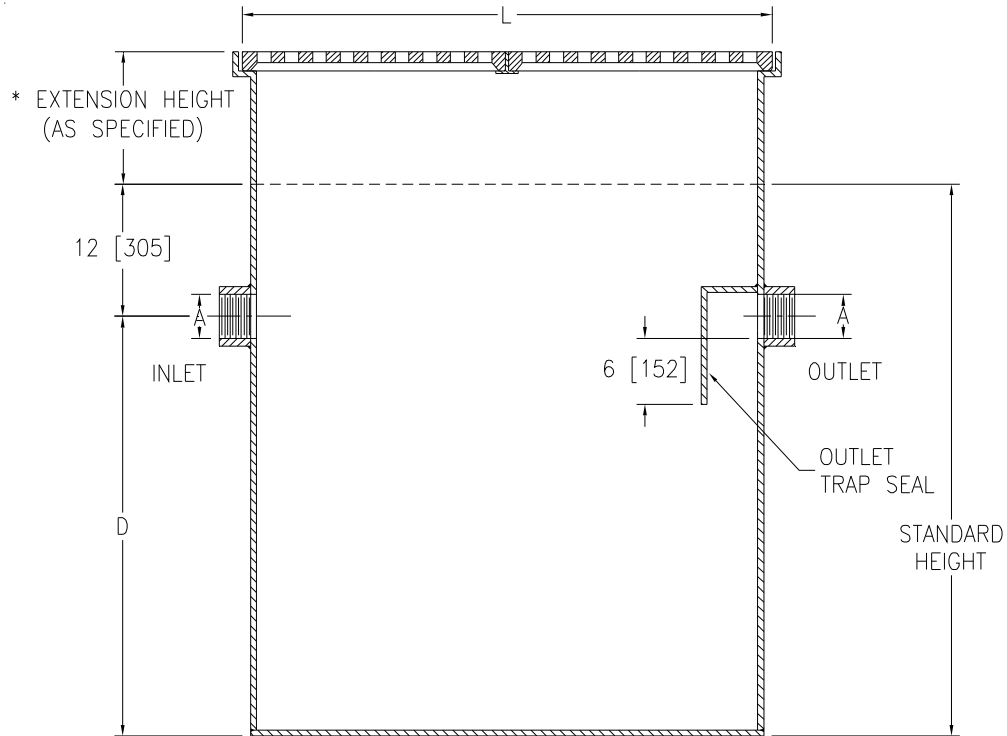

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width	Approx. Wt. Lbs. [Kg]
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	2	24 [610]	133 [60]
50	50 [189]	4 [102]	48 [1219]	26 [660]	120 [454]	4	24 [610]	204 [92]
150	150 [568]	4 [102]	48 [1219]	38 [965]	360 [1363]	8	48 [1219]	368 [167]
250	250 [946]	6 [152]	72 [1829]	39 [991]	540 [2044]	12	48 [1219]	1294 [587]
500	500 [1893]	6 [152]	120 [3058]	51 [1295]	1200 [4542]	20	48 [1219]	2204 [1000]

**ENGINEERING SPECIFICATION: ZURN Z1187-SI-E**

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with integral extension, threaded inlet and outlet, complete with removable heavy-duty grates.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_ -DG Duresist Grate
- \_\_\_ -NH No-Hub Inlet and Outlet (Specify Size)
- \_\_\_ -SC Extra-Heavy-Duty Reinforced Cover(s) for vehicular traffic. (Specify working load requirements)
- \_\_\_ -VP Vandal-Proof Screws

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 12/02/08	C.N. NO. 99432
DWG. NO. 84041	PRODUCT NO. Z1187-SI-E	